

MULTI-LOADER 6.0



ALMACRAWLER

MULTI-LOADER 6.0

Multi-Loader is the last generation tracked crawler carriers, equipped with bi-levelling system and radio-controlled.

Loading capacity

The new Multi-Loading tracking system offers the possibility to handle different types of loads up to 6 t of weight.

Crawler traction and low ground pressure

The unique Bi-Levelling crawler traction allow the carrier to operate on all different type of terrain, ensuring the maximum manoeuvrability and precision even in the narrowest spaces, with the minimum ground pressure.

Engines available

The Multi-Loader 6.0 is available in 3 versions with different types of engines.

The full electric model, the **Multi Loader ELC**, has the innovative Lead Crystal n°8 180Ah 48V provides 8 hours of working time in mixed cycle, taking advantage of a maximum movement speed of 2.6 km/h.

An High-Frequency battery charger directly installed inside the main chassis, allows the full charge of the Multi-Loader in only 5 hours, while an auxiliary mains electric pump 220V-2,2 kW enables the possibility to use the carrier also during the battery charging.

The **Multi Loader EVO** equipped with high-performance internal combustion engine Yanmar 3TNV76 (diesel) - 25HP, reaches maximum speeds of 3.7 km/h. This model is especially suitable for outside use.

The **Multi Loader Bi-Energy** have a double motorization, thermic and electric, that provides full versatility, both for inside or outside applications.


Dynamic Levelling

The levelling of the load-deck is completely automatic when using the Dynamic Levelling System even on slopes or uneven surfaces.

Multi-Loader can overcome both longitudinal slopes until 20° and lateral slopes until 25° at the same time, always ensuring the absolute integrity of the load being carried.




MULTI-LOADER 6.0 ELC

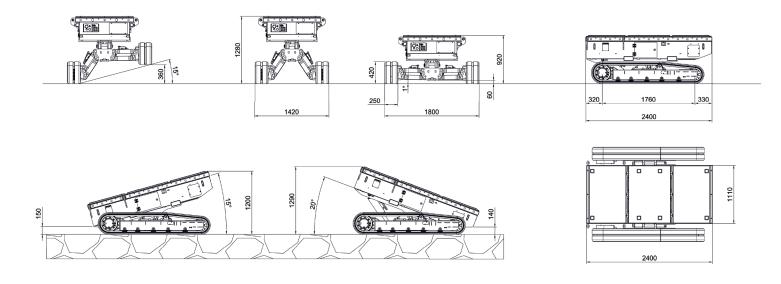


| Technical data | MULTI-LOADER 6.0 ELC | MULTI-LOADER 6.0 EVO | MULTI-LOADER 6.0 Bi-Energy | MULTI-LOADER 6.0 Bi-Energy with crane |
|------------------------------|----------------------------|-------------------------------|--------------------------------------|---|
| Max capacity | 6000 kg | 6000 kg | 6000 kg | 5500 kg |
| Min height | 0.92 m | 1.44 m | 1.44 m | 2.61 m |
| Min width | 1.42 m | 1.42 m | 1.42 m | 1.42 m |
| Max width | 1.8 m | 1.8 m | 1.8 m | 1.8 m |
| Dynamic levelling | Yes | Yes | Yes | Yes |
| Battery autonomy | 8 h | - | 5 h | 5 h |
| Powered | - | Yanmar 3TNV76 (diesel) - 25HP | Yanmar 3TNV76 (diesel) - 25HP | Yanmar 3TNV76 (diesel) - 25HP |
| Powered (electric engine) | 48V - 3kW | - | 48V - 3kW | 48V - 3kW |
| Battery pack | Lead Crystal n°8 180Ah 48V | - | Lead Crystal n°8 180Ah 48V | Lead Crystal n°8 180Ah 48V |
| Battery charger | n°2 20Ah-110/220V | - | n°2 20Ah-110/220V | n°2 20Ah-110/220V |
| Recharging time | 5 h | - | 5 h | 5 h |
| Consolle | Remote | Remote | Remote | Remote |
| Undercarriage | Bi-Levelling | Bi-Levelling | Bi-Levelling | Bi-Levelling |
| Longitudinal levelling Front | 20° | 20° | 20° | 20° |
| Longitudinal levelling Rear | 15° | 15° | 15° | 15° |
| Lateral levelling | +/- 15° | +/- 15° | +/- 15° | +/- 15° |
| Electric pump | - | 220V-2kW or 110V-1,9kW | - | - |
| Hydraulic commands | Proportionals | Proportionals | Proportionals | Proportionals |
| Direction-Control System | Yes | Yes | Yes | Yes |
| Easy-Drive System | Yes | Yes | Yes | Yes |
| Kit for high speed | max 2.6 km/h | max 3.7 km/h | max 3.7 km/h | max 3.7 km/h |
| Control of inclination | Automatic | Automatic | Automatic | Automatic |
| Gradeability | 25° | | | |
| Side slope | 25° | | | |
| Length | 2.4 m | 3.0 m | 3.0 m | 3.0 m |
| Total weight | 2250 kg | 2250 kg | 2550 kg | 2990 kg |


MULTI-LOADER 6.0 EVO / BI-ENERGY

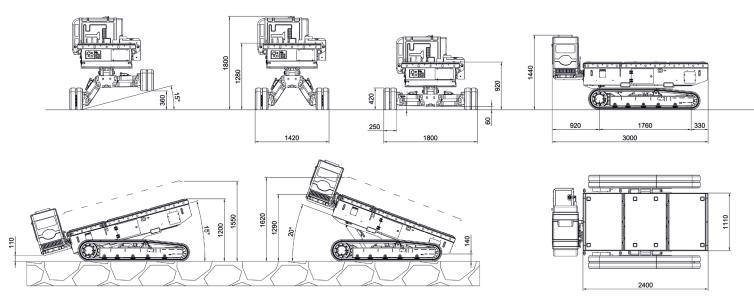





4.1 T-CRANE MULTI-LOADER 6.0














ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.






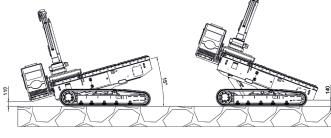

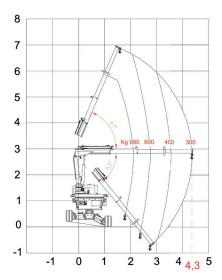

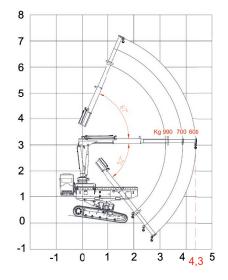

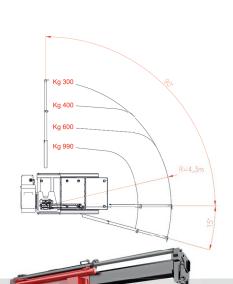

T-CRANE kit (removable) Self-propelled crane

Standard version

- Cable transducer for extension
- Absolute encoder for turrent rotation
- Inclination sensor for boom angle

Optional

Personalised colour







Max outreach 4.3 m

Max capacity

5.5 ton.