

ARX 90C

ARTICULATED TANDEM ROLLER

EU Stage V / U.S. EPA Tier 4f



MEETING THE HIGHEST STANDARDS

The Ammann ARX 90C Combination Roller provides the benefits of vibratory and pneumatic compactors in a single machine while meeting EU Stage V / U.S. EPA Tier 4f emissions standards. The optional ACE^{force} system provides a host of benefits including measurement and documentation, evaluation of material stiffness, operator guidance and documentation.

PRODUCTIVITY

Multiple vibratory frequencies

Varied vibratory settings adjust compaction output for even more precise compaction control and higher quality

Advanced articulation joint

Permanent contact with the surface and a wide range of working widths maximises productivity

Machine customisation

Options make the machine a perfect match for diverse jobsites and varying customer needs

ERGONOMICS

Multi-functional display

The central display is located in front of the operator for optimal machine control and monitoring

Intelligent functions

Integrated advanced functions make machine more operator friendly, intuitive and safe

Operator station

An intuitively organized, fully adjustable operator station has all controls located within easy reach

SERVICEABILITY

Accessible engine compartment

Tool-free, wide-opening side doors on the engine compartment

Easy-to-reach maintenance points

All service points are conveniently located for easy access

Self-diagnostic system

The on-board, automated diagnostic system quickly identifies potential problems


APPLICATIONS

- Medium and large compaction sites
- Transport construction
- Municipal and town roads
- Motorways
- Airport runways
- Housing developments
- Industrial zones
- City centers

MAXIMUM RECOMMENDED COMPACTED LIFT THICKNESS AT OPTIMAL WORKING CONDITIONS

| | Sand / Gravel | Mixed Soils | Silt | Clay | Stabilisation | Asphalt |
|---------|---------------|--------------|------|------|---------------|-----------------|
| ARX 90C | 0.3 m (12 in) | 0.2 m (8 in) | - | - | 0.15 m (6 in) | 0.12 m (4.7 in) |

TECHNICAL SPECIFICATIONS
ARX 90C ARTICULATED TANDEM ROLLER
EU Stage V / U.S. EPA Tier 4f

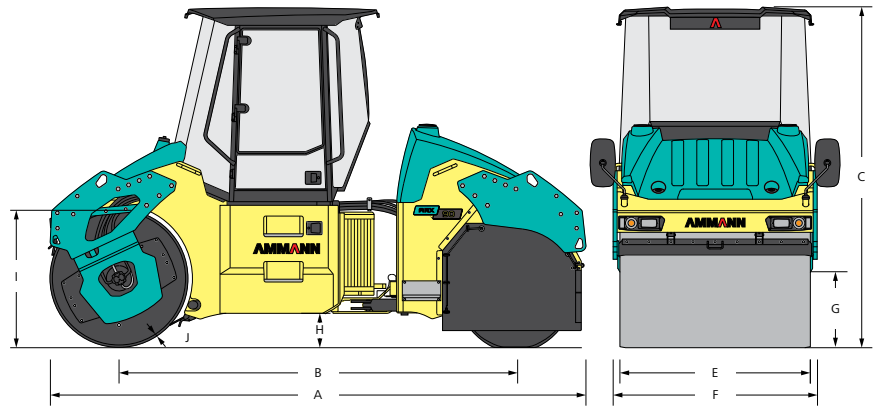

| DIMENSIONS | | |
|------------|----------------------|--------------------|
| A | Machine length | 4720 mm (185.8 in) |
| B | Wheelbase | 3500 mm (137.8 in) |
| C | Machine height | 3000 mm (118.2 in) |
| E | Drum width | 1680 mm (66.1 in) |
| F | Machine width | 1800 mm (70.9 in) |
| G | Side clearance | 780 mm (30.7 in) |
| H | Ground clearance | 300 mm (11.8 in) |
| I | Drum diameter | 1220 mm (48.0 in) |
| J | Drum shell thickness | 19 mm (0.7 in) |

| WEIGHT & OPERATING CHARACTERISTICS | |
|------------------------------------|------------------------|
| Operating weight | 9570 kg (21 100 lb) |
| Operating weight max. | 11 040 kg (24 340 lb) |
| Stat. lin. load of front drum | 28.5 kg/cm (159 lb/in) |
| Max. transport speed | 10.5 km/h (6.5 MPH) |
| Gradeability with / without vibr. | 25% / 30% |
| Turning radius inner (edge) | 5470 mm (215.4 in) |
| Drum offset | 170 mm (6.7 in) |

| ENGINE | |
|-----------------------------|-------------------------------|
| Manufacturer | Deutz TCD3.6 L4 |
| Power output ISO 14396 | 74.4 kW (100 HP) |
| Maximum torque | 410/1600 Nm (ft lb)/rpm |
| Emmission class | EU Stage V / U.S. EPA Tier 4f |
| Exhaust gas after-treatment | EGR+DOC+DPF+SCR |

| COMPACTION FORCES | |
|----------------------|-----------------------------|
| Frequency I | 38–42 Hz (2280–2520 VPM) |
| Frequency II | 45–54 Hz (2700–3240 VPM) |
| Amplitude I | 0.7 mm (0.028 in) |
| Amplitude II | 0.34 mm (0.013 in) |
| Centrifugal force I | 47–68kN (10 566–15 287 lbf) |
| Centrifugal force II | 69–84kN (15 511–18 884 lbf) |

| MISCELLANEOUS | |
|---------------------|--------------------------|
| Brakes operating | Hydrostatic |
| Brakes parking | Mechanical multiple-disc |
| Brakes emergency | Mechanical multiple-disc |
| Fuel tank capacity | 220 l (58.1 gal) |
| Water tank capacity | 840 l (222 gal) |
| Anti-adhesive tank | 28 l (7.4 gal) |
| Tire size | 11,00x20"16PR |
| Voltage | 24 V |

STANDARD EQUIPMENT

- CE conformity
- ROPS/FOPS Open platform with Plastic roof
- Pressure water sprinkling with interval switch, 3 stage filtration and 2 pumps
- Combi-version: One non-split drum / 4 tyres in rear
- Combi-version: Front and rear drive and front vibration
- Combi-version: Incl. Emulsion-spraying and Thermal aprons
- Lockable articulation joint with Oscillation and Offset (Crab mode)
- Foldable scrapers
- 2 amplitudes / Multiple frequencies
- Operator's station with one drive lever (RH)
- 170° Slideable, rotatable and horizontally adjustable driver's seat with armrests
- Multi-functional display for machine control and overview
- Adjustable Steering column
- Road lights (headlights, rearlights, turning signals, brake lights)
- Telematics Ready
- On-Board diagnostics
- Centralized draining points

OPTIONAL EQUIPMENT

- Cab with ROPS/FOPS
- Air condition
- Additional Lights 360° LED
- Warning beacon
- Combi roller - Unsplitted drum with HF
- Infrared thermometer
- Compaction Measuring System ACE^{force}
- Chip Spreader Ammann
- Edge cutter
- Rear view camera
- Telematics System ServiceLink (3 Years)
- GPS Q-Compaction
- Backup alarm
- Bio-degradable hydraulic oil
- Customer color
- Sun Films on glasses

Auckland Head Office
6-10 Parkway Drive,
Mairangi Bay, Auckland
Phone: (+64) 09 443 2436
Email: sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington, Auckland
Phone: (+64) 09 553 5470
Email: salesmtwell@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua, Wellington
Phone: (+64) 04 212 2456
Email: saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn, Christchurch
Phone: (+64) 03 341 6923
Email: saleschch@yrco.co.nz

