




CREATING POWER SOLUTIONS.

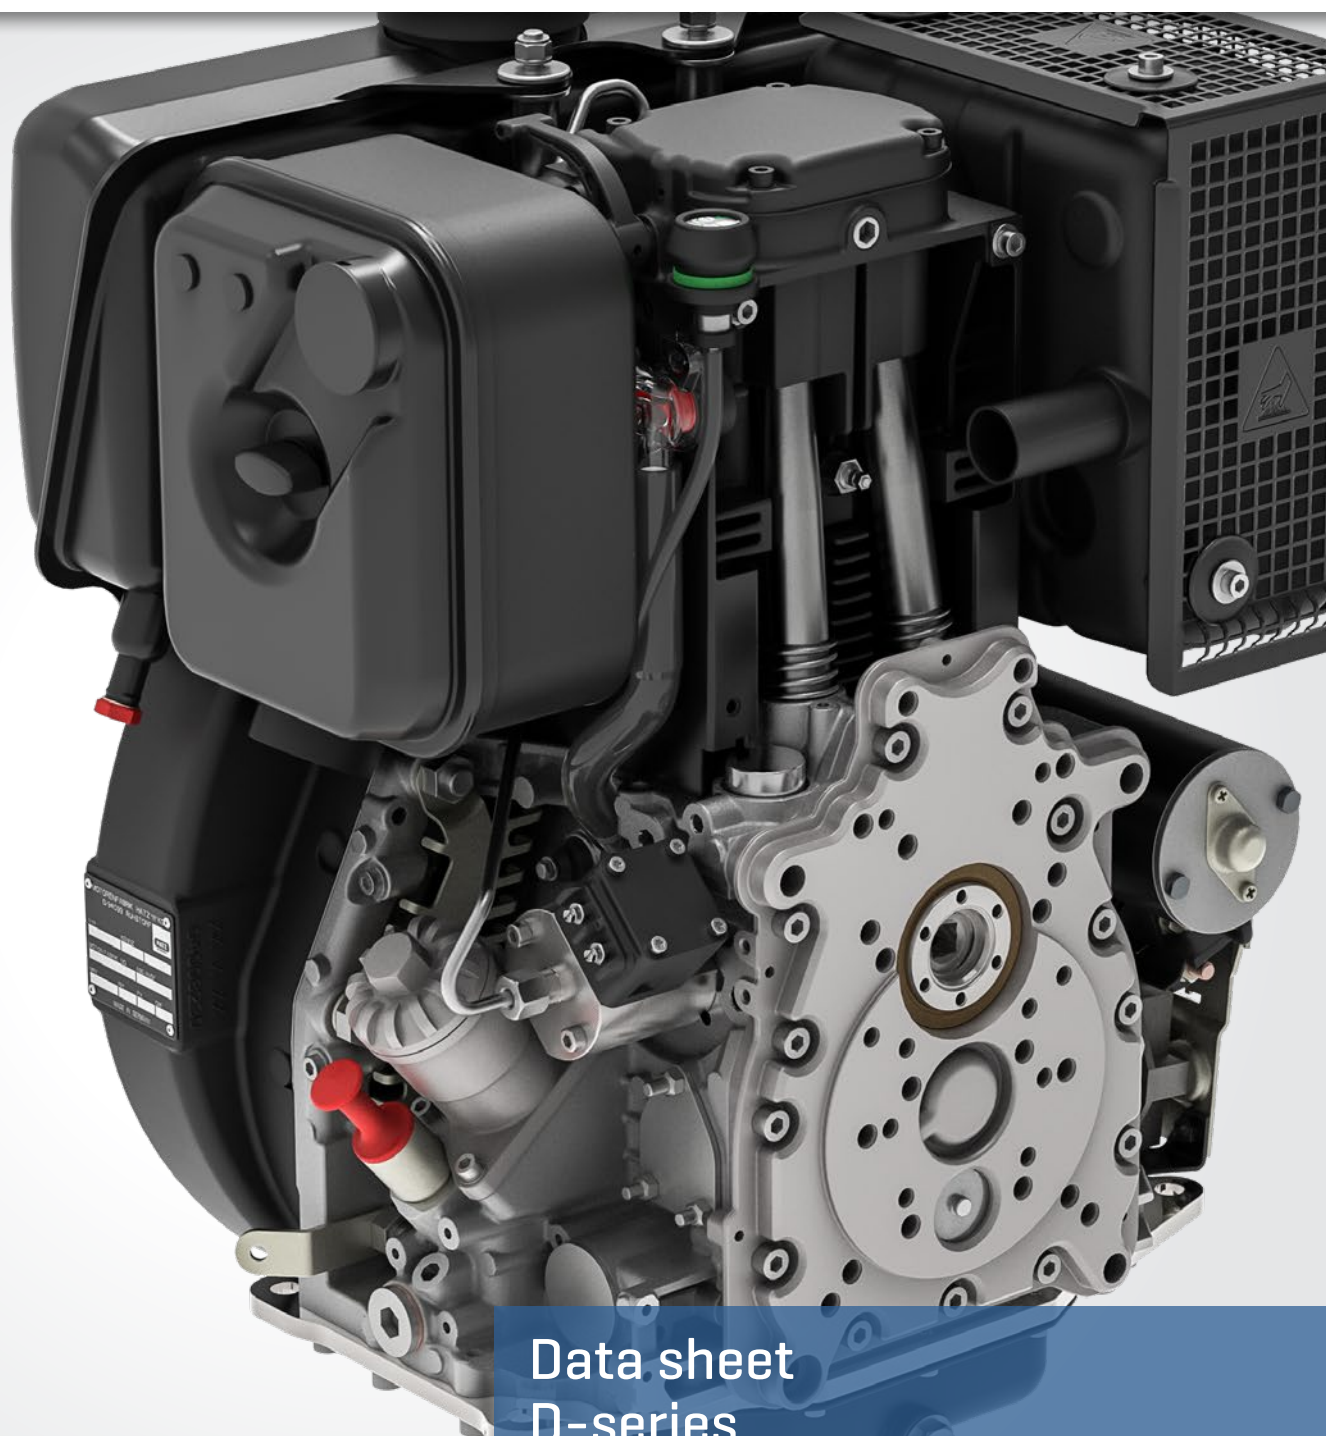

Data sheet D-series

Hatz industrial diesel engines



1D81C – Silent Pack

For decades Hatz Silent Packs have been setting benchmarks for quiet and reliable diesel engines. Silent Pack is more than just an engine, it is a complete installation solution where the customer no longer has to take care of anything. Position, connect, start.



Hatz 1D90V

For installations with special requirements regarding outer dimensions, Hatz has also alternatively developed the 1D90 engine with vertical crankshaft. This allows the best possible use of the available installation space, thus avoiding unnecessary power deflections.

Hatz D-series:

The single-cylinder diesel engine with revolutionary engineering

As our customers can confirm, Hatz diesel engines are the most robust and durable in this market segment. Wherever they are installed makes no difference; whether at very low temperatures or in a tropical climate, the Hatz D-series carries out its job reliably. With regular maintenance many thousands of hours are commonplace, using Hatz Genuine Spare Parts, of course.

High performance and flexibility

The Hatz D-series is best suited for challenging tasks. It is characterized by high performance and flexibility in particular. With 11.2 kilowatts, the Hatz 1D90 engine is the highest performance single-cylinder diesel engine in the world. The engines can be configured as required and in the basic version limited to the core engine only. With up to three different power take offs on a single engine, the Hatz D-series provides more possibilities for the customization of a machine than any other engine on the market.

Extremely quiet running

Compensation weight on the flywheel side crank arm as well as balance weights cast in the flywheel ensure the special quiet running of the Hatz D-series. Optionally available counter-rotating balance shafts even ensure 100 percent first order counter balance.

Single-cylinder for the digital future

The Hatz E1 technology controls the injection electronically. In the form of the 1D90E, it enters into a fruitful connection with the core engine of the D-Series, which has proven its excellence hundreds of thousands of times. This provides completely new possibilities in a digital world.

Ready for the Internet of Things (IoT)

The Hatz 1D90E is well equipped to redefine business models or increase their efficiency. Thanks to the Hatz E1

technology, the associated electronic engine control and connected solutions, for the first time in this performance class machine manufacturers can expand their customer relationships, lessors can optimize the utilization of their fleets and machine operators can ensure more efficient processing of their orders.

Environmental aspects

Even without legal provisions the Hatz D-series engines have been produced and sold in accordance with the strict US emissions standard EPA Tier 4 for years.

The Hatz 1D90E meets both North American requirements and EU Stage V. All engines of the D-series comply with the European specifications.

The Silent Pack

The Hatz D-series is the first single-cylinder diesel engine series which can be equipped with an organically adapted, sound-insulated noise encapsulating housing, the Silent Pack. The Silent Pack reduces the radiated noise emission by up to 12 dezibels in a 7 meter radius.

The capsule consists of sheet metal construction with structure-borne sound insulation that is mounted on the engine. All control and service points are accessible from the outside. The sound suppressor is housed in a separate capsule over the flywheel. Due to the cooling air circulation, Silent Pack engines – like all other Hatz engines – can be used under virtually all climatic conditions.

Sales area exhaust certificate	[rpm]	IFN Rating F/IFN/ICFN Rating						
		1D42	1D50	1D81	1D81C	1D90E	1D90	1D90V
US EPA T4f/CARB constant		–	–	–	–	1500-3000	–	–
USA EPA T4f variable		–	–	–	–	3000	–	–
Europe EU V constant		1500, 1800, 3000	3000	1500, 1800, 3000	1500, 1800, 3000	1500-3000	1500, 1800, 3000	1500, 3000
Europe EU V variable		2000-3200	2400-3200	1500-3000	1500-3000	3000	1500-3000	2300-3000
Less regulated		1500-3600	1500-3600	1500-3600	1500-3000	3000	1500-3000	


Technical data, performance table

Technical data			1D42	1D50	1D81	1D81C	1D90E	1D90	1D90V
Engine	Type		Air-cooled 4 stroke diesel engine						
	Cylinder		1						
	Direct injection		mechanical	mechanical	mechanical	mechanical	electronical	mechanical	mechanical
	Position of crank shaft		horizontal						
	Bore x stroke [mm / in]		90 x 70 / 3.54 x 2.76	97 x 70 / 3.82 x 2.76	100 x 85 / 3.94 x 3.35	100 x 85 / 3.94 x 3.35	104 x 85 / 4.09 x 3.35	104 x 85 / 4.09 x 3.35	
	Displacement [l / cu in]		0.445 / 27.2	0.517 / 31.5	0.667 / 40.7	0.667 / 40.7	0.722 / 44.0	0.722 / 44.0	
	Average piston speed @ 3000 rpm [m/s / ft/min]		8.5 / 1673						
	Compression ratio		21.5 : 1						
	Lubrication oil consumption, related to full load		approx. 1 % of fuel consumption						
	Oil filling	max. [l / US qts]	1.2 / 1.27	1.5 / 1.59	1.9 / 2.0				1.6 / 1.7
		min. [l / US qts]	0.8 / 0.85	1.0 / 1.06	1.0 / 1.06				0.9 / 0.95
	Lowest idle speed [rpm]		approx. 800						
	Speed control	Static speed droop @ 3000 rpm	approx. 5%				configurable	approx. 5%	
		Control method	mechanical				CAN J1939, multi stage switch, analog	mechanical	
Installation information	Amount of combustion air @ 3000 rpm approx. [kg/h / cfm] ¹		47.7 / 23.3	56.4 / 27.6	72.3 / 35		79.5 / 39		
	Amount of cooling air @ 3000 rpm approx. [kg/h / cfm] ¹		325.1 / 159	397.4 / 195	780.3 / 380	606.9 / 297	780.3 / 380		1083.7 / 530
	Mass moment of inertia J _{engine} [kgm² / lb ft²]	Standard flywheel	0.24 / 5.67	0.41 / 9.7	0.51 / 12.05				
		Heavy flywheel	0.28 / 7.08	—	0.63 / 14.9				
	Starter [V]		12 [2.0 kW / 2.7 hp] 24 [3.0 kW / 4.0 hp]						
	Alternator charging current @ 3000/1500 rpm [A]		approx. 9/4 [14 V] approx. 5/2 [28 V]		approx. 16/5 [14 V] approx. 9/4 [28 V]				
Battery capacity min. / max. [Ah]		45 / 88 [12 V] 36 / 55 [24 V]							
Dimensions	Engine with crankhandle start [kg / lb]		71 / 156.5	80 / 176.4	97 / 213.8	118 / 260.0	—	98 / 216.0	—
	Engine with electric start [kg / lb]		78 / 172.0	83 / 183.0	105 / 231.4	126 / 277.7	107 / 235.9	106 / 233.6	106 / 233.6
	L x W x H [mm / in]		357 x 432 x 500 / 14.1 x 17.0 x 19.7	357 x 432 x 512 / 14.1 x 17.0 x 20.2	373 x 472 x 599 / 14.7 x 18.6 x 23.6	505 x 523 x 591 / 19.9 x 20.6 x 23.2	373 x 505 x 599 / 14.7 x 19.9 x 23.6	373 x 472 x 599 / 14.7 x 18.6 x 23.6	583 x 486 x 429 / 23.0 x 19.1 x 16.9
Engine output [kW / hp]		[rpm]	1D42	1D50	1D81	1D81C	1D90E ²	1D90	1D90V
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For variable speed.		3200	6.8 / 9.1	7.5 / 10.1	—	—	—	—	—
		3000	6.6 / 8.9	7.5 / 10.1	10.0 / 13.4	9.5 / 12.7	10.5 / 14.1	11.0 / 14.8	—
		2800	6.4 / 8.6	7.2 / 9.7	9.6 / 12.9	9.1 / 12.2	10.1 / 13.4	10.6 / 14.2	—
		2600	6.1 / 8.2	6.8 / 9.1	9.2 / 12.3	8.7 / 11.7	9.6 / 12.8	10.1 / 13.5	—
		2300	5.4 / 7.2	—	6.3 / 8.4	8.0 / 10.7	8.8 / 11.8	9.2 / 12.3	—
		2000	4.7 / 6.3	—	7.5 / 10.1	7.1 / 9.5	7.7 / 10.3	8.1 / 10.9	—
		1800	—	—	6.8 / 9.1	6.5 / 8.7	7.1 / 9.5	7.3 / 9.8	—
		1500	—	—	5.5 / 7.4	5.4 / 7.2	5.7 / 7.6	6.1 / 8.2	—
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For constant speed.		3000	6.6 / 8.9	7.5 / 10.1	10.0 / 13.4	9.5 / 12.7	10.5 / 14.1	11.0 / 14.8	—
		1800	4.1 / 5.5	—	6.8 / 9.1	6.5 / 8.7	—	7.3 / 9.8	—
		1500	3.3 / 4.4	—	5.5 / 7.4	5.4 / 7.2	5.7 / 7.6	6.1 / 8.2	—
Blocked ISO brake horsepower (IFN) for intermittent loading according to ISO 3046-1. For variable speed.		3600	7.0 / 9.4	7.5 / 10.1	10.1 / 13.5	—	—	—	—
		3000	6.6 / 8.9	7.5 / 10.1	10.1 / 13.5	9.6 / 12.9	10.5 / 14.1	11.2 / 15.0	—
		2800	6.4 / 8.6	7.2 / 9.7	9.7 / 13.0	9.2 / 12.3	10.1 / 13.4	10.7 / 14.3	—
		2600	6.1 / 8.2	6.8 / 9.1	9.3 / 12.5	8.8 / 11.8	9.6 / 12.8	10.3 / 13.8	—
		2300	5.4 / 7.2	6.0 / 8.0	8.4 / 11.3	8.1 / 10.9	8.8 / 11.8	9.5 / 12.7	—
		2000	4.7 / 6.3	5.2 / 7.0	7.6 / 10.2	7.1 / 9.5	7.7 / 10.3	8.4 / 11.3	—
		1800	4.1 / 5.5	4.6 / 6.2	6.8 / 9.1	6.5 / 8.7	7.1 / 9.5	7.6 / 10.2	—
		1500	3.3 / 4.4	3.7 / 5.0	5.5 / 7.4	5.4 / 7.2	5.7 / 7.6	6.4 / 8.6	—
Less regulated markets									


¹ For other speeds, there is a linear reduction in the air requirement. ² Power ratings include generator power

Maximum power output, torque und fuel consumption


1D42

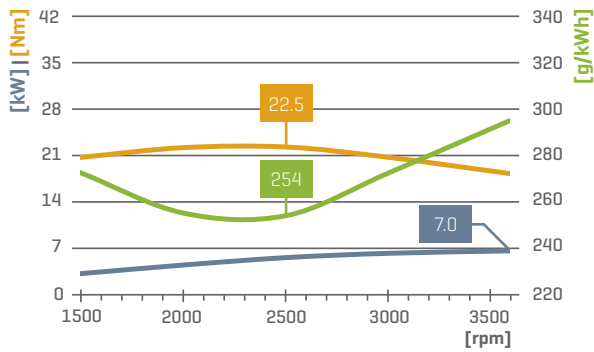


1D50

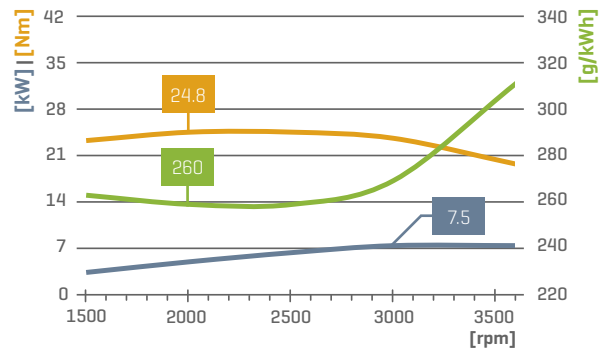


1D81

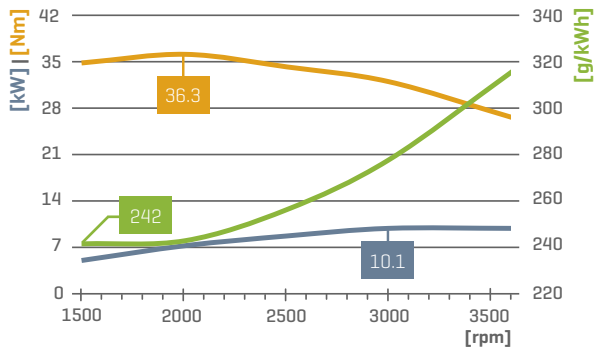


1D81C

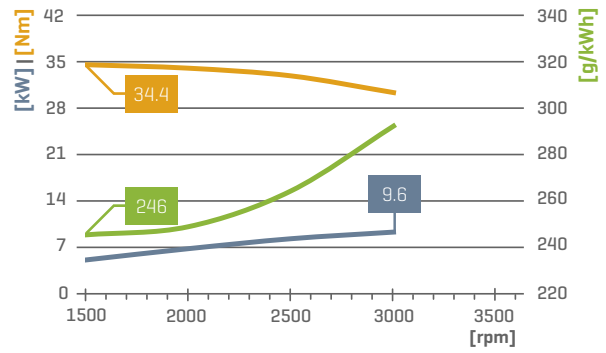

1D90E²

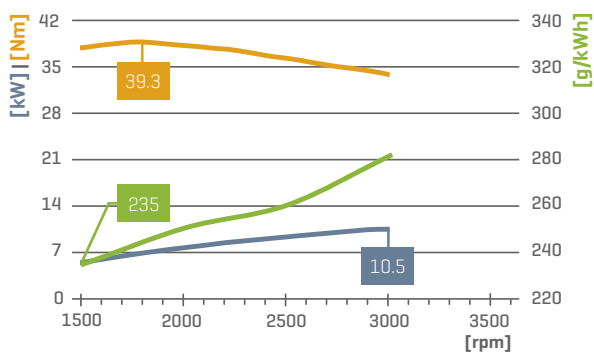

1D90 | 1D90V

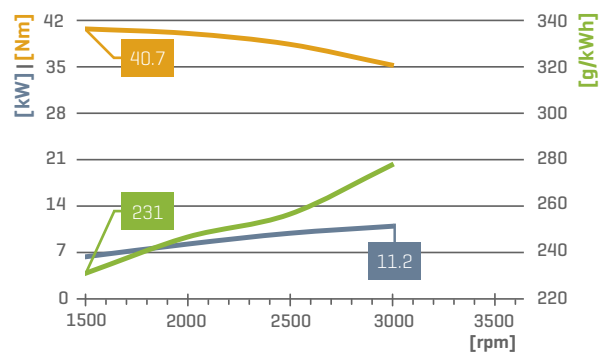

Power ratings

Power ratings refer to standard reference conditions of ISO 3046-1 (IFN):
 + 25 °C (77 °F), 100 kPa, relative humidity 30 %. The specified power is reached during the running-in period, and can be 5 % less on delivery. Power reduction acc. to ISO 3046-1.
 Standard values: More than 100 m above sea level approx. 1 % per 100 m, above 25 °C (77 °F) approx. 4 % per 10 °C (50 °F).
 The power taken from the alternator also has to be added to the power calculation.

Maintenance and operating points

1D42 | 1D50 | 1D81 | 1D90E | 1D90

Cold start device

Decompression lever

Injector

Cylinder head cover

Air filter

Engine oil filter


Stop lever³

Oil dipstick and oil filler

Fuel filter

Speed control lever³

Oil drain plug

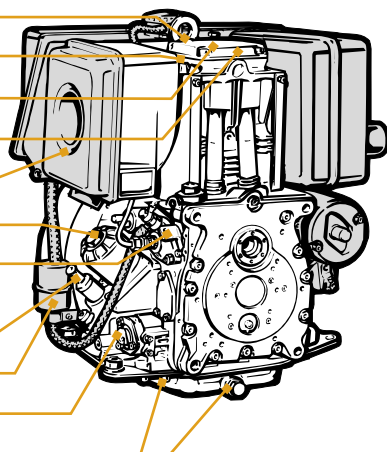

1D81C

Cold start device

Decompression lever

Accessible after opening the capsule: Injector, cylinder head cover, air filter


Engine oil filter

Stop lever

Oil dipstick and oil filler

Speed control lever

Oil drain plug

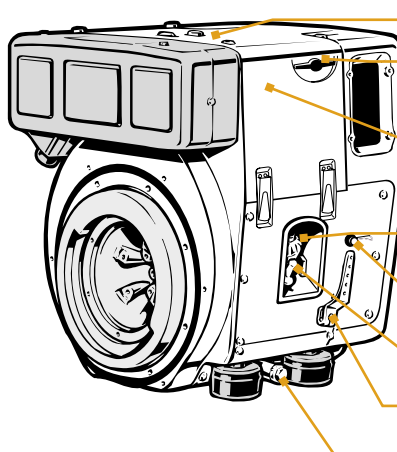

1D90V

Injector

Cylinder head cover

Air filter

Oil filler


Dipstick

Speed control lever






Engine oil filter

Oil drain plug

Fuel filter

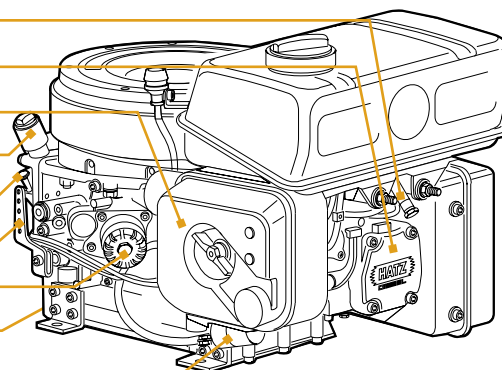

Power-take-off points

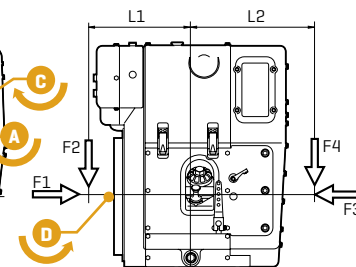




Power take off		1D42	1D50	1D81	1D81C	1D90E	1D90	1D90V
Transfer-able torque	A	100 %						
	C	not available						not available
	D	100 %						
Permissible load	F1	1260 N		2250 N				
	F2	F2 = $\frac{261\,000}{L1 \text{ [mm / in]} - 42 / 1.65}$ [N]		F2 = $\frac{477\,000}{L1 \text{ [mm / in]} - 50.5 / 1.98}$ [N]				
	F3	1080 N		1350 N				
	F4 ^a	F4 = $\frac{67\,500}{L2 \text{ [mm / in]} - 128 / 5.04}$ [N]		F4 = $\frac{67\,500}{L2 \text{ [mm / in]} - 134 / 5.28}$ [N]				

³ Only for mechanically controlled engine types ^a If belt tension is upwards, outboard bearing is necessary.




Dimensions [mm / in] and inclinations⁵ [°]

Spread at box dimensions ± 3 millimeters due to tolerance.
Drawings with detail and connection dimensions as PDF and DXF
can be found at www.hatz-diesel.com.




**1D42
1D50**

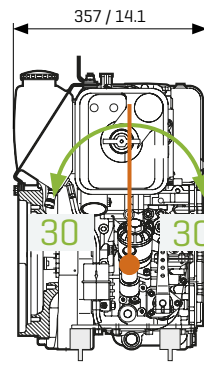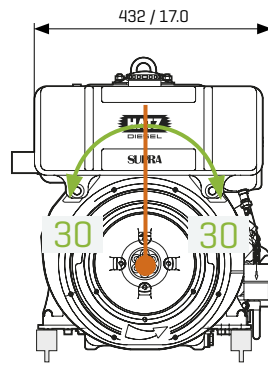



**1D81
1D90E
1D90**

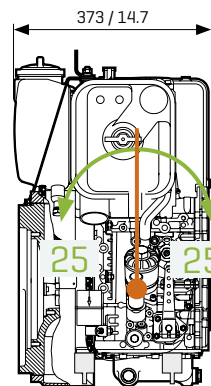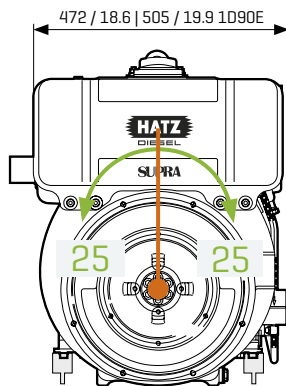

1D81C

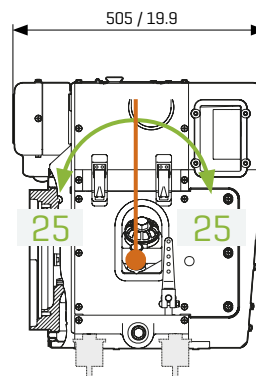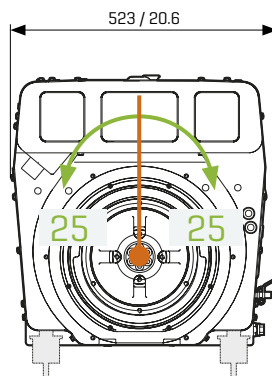

1D90V

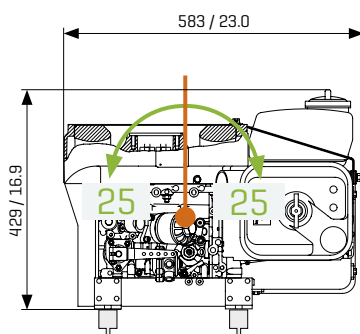

⁵ Maximum permanent inclined positions

Motorenfabrik Hatz GmbH & Co. KG
Ernst-Hatz-Str. 16
94099 Ruhstorf a. d. Rott
Germany
Phone +49 8531 319-0
marketing@hatz-diesel.de
www.hatz-diesel.com



CREATING POWER SOLUTIONS.

70252825 EN 02.20 Printed in Germany
We reserve the right to make all changes
that serve technical development.

Auckland Head Office
6-10 Parkway Drive,
Mairangi Bay, Auckland
Phone: (+64) 09 443 2436
Email: sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington, Auckland
Phone: (+64) 09 553 5470
Email: salesmtwell@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua, Wellington
Phone: (+64) 04 212 2456
Email: saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn, Christchurch
Phone: (+64) 03 341 6923
Email: saleschch@yrco.co.nz

YR Youngman
Richardson