

Mini Excavator

HD85V5

A 8.5 ton zero tail swing mini excavator
with exceptional performance



Mini Excavator

KATO

HD85V5

A 8.5 ton zero tail swing mini excavator with exceptional performance

Features

- Newly designed operator's space
- Reduced tail swing
- Easy maintenance
- Low fuel consumption
- Powerful digging & quick response
- Factory fit anti burst valves
- Air conditioned
- Stereo

Safety

- Gate lock system
- Neutral engine start
- ROPS cabin
- Auto parking brake in swing & traction motors

Durability

- Easily adjustable pins for longer life
- Castle nuts for boom & arm joints
- Single structured swing pin

Easy Maintenance

- Large side covers for easy access & maintenance
- Wide, fully opening engine cover enables ease of maintenance
- Filters are conveniently located - Includes:
Large fuel filter, water separator & tank breather



Comfortable Operating Room



Centralised switches - includes key start, throttle dial, auto idle & eco mode



Easily visible monitor - includes travel speed, auto idle, eco mode, hour meter & engine management



Full suspension seat
- c/w retracting seat belt



Control Lever with proportional switch for auxiliary hydraulic



Traction foot pedals (fold away)



Mini Excavator

KATO

Easy maintenance



Large rear access for easy engine maintenance



Large side cover for easy service access



Water separator with indicator

Safety



Gate Lock System




Single-structured Swing Pin



Fuel refill located in a convenient position

Track options

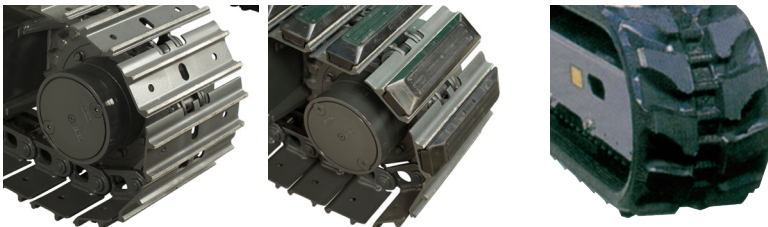

Steel Track / Rubber Pad / Rubber Track Options


Easy skimming work



Close distance between Bucket Tooth and Dozer Blade


Lower Fuel Consumption

Max. 24% fuel saving*



High Digging Power & Quick Response

Digging force increased by 10%
Highly responsive 3-pump system

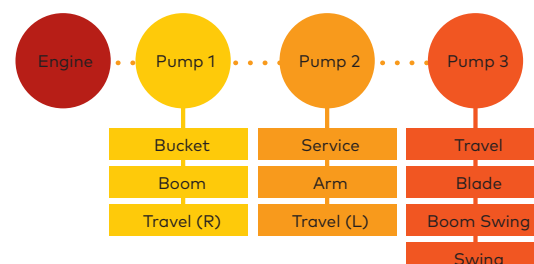


HD85V5

Mini Excavator




SPECIFICATIONS

■ Dimensions (Units mm)

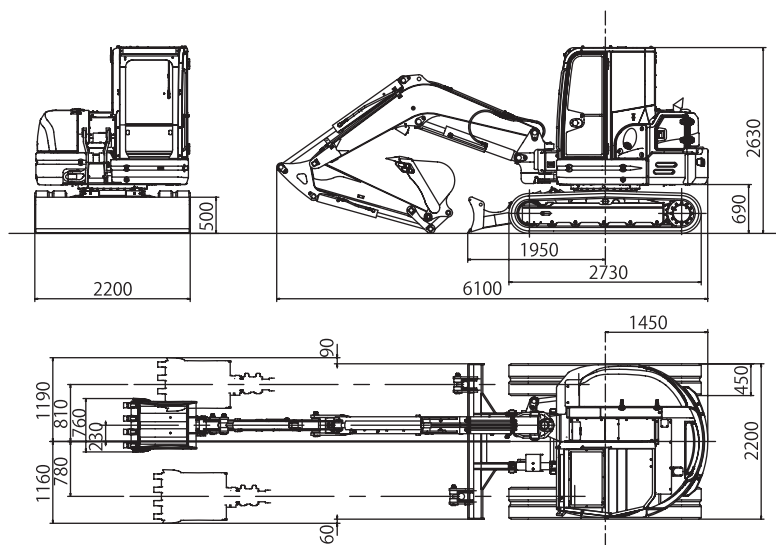

■ Working Range (Units mm)

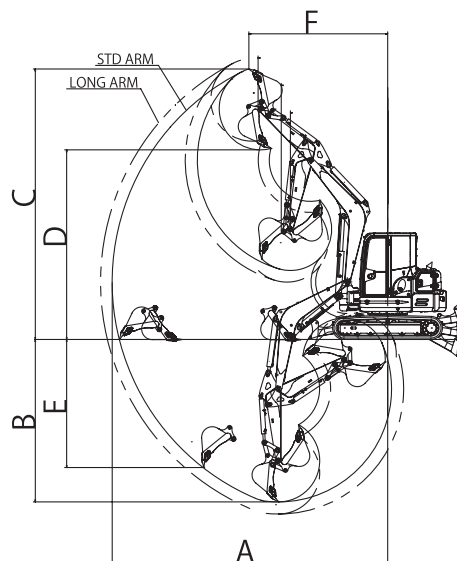

STANDARD

- ROPS cabin
- Auxiliary piping
- Flashing light
- Removable counter weight
- Rubber tracks

OPTIONS

- Rubber pads
- Short arm
- Air conditioning

	Long arm	Short arm option
A. Max. digging radius	7110	6830
B. Max. digging depth	4320	4020
C. Max. digging height	6920	6700
D. Max. dumping height	4910	4700
E. Max. vertical digging depth	3460	3170
F. Min. front turning radius	2720	2640
At right boom swing	2240	2150

Performance		Boom swing system	
Bucket capacity	0.25m ³	Type	Boom offset with hydraulic cylinder
Bucket width (Standard)	760mm	Swing angle (L/R)	50°/80°
Operating weight: 4-Post(Cabin)	8515 kg	Hydraulic system	
Transportation weight: 4-Post(Cabin)	8440 kg	Pressure	24.5MPa 250kgf/cm ² / 20.6MPa 210kgf/cm ²
Swing speed	9.0min ⁻¹	Pump hydraulic flow	75.6L/minx2+ 44.2L/min
Travel speed (low/high)	2.5 / 4.4km/h	Dozer blade	
Gradeability	58% (30°)	Size	2200x500mm
Ground pressure	39kPa (0.39kgf/cm ²)	Lift above ground / Drop below ground	420mm / 440mm
Max bucket digging force	55kN	Max auxiliary flow	
Engine		1st Auxiliary line	60L/min
Model	YANMAR 4TNV 98C	2nd Auxiliary line	44L/min (Option)
Rated output	44.3kW / 2100min ⁻¹		
Fuel tank capacity	110L		

Product Range:

*Note: Depending on factory availability & changes specifications may vary from above.



PARTS AND SERVICE

We are proud of the back-up service we offer to customers. The importance of stocking genuine spare parts for all the equipment we supply is a high company priority.



Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

