



# Portable Water Pumps

General all-purpose clean water, semi-trash and trash pumps with powerful suction capacity, lower fuel consumption and high delivery volume.



# Clean Water Pumps

POWERED by  
**HONDA**




General all-purpose clean water pumps with powerful suction capacity, lower fuel consumption and high delivery volume.

## Petrol Powered

**SEH-25L, SEH-40H, SEH-50X, SEH-80X, SERH-50Z**

### Features:

- Honda GX engine
- Compact & lightweight
- Easy-to-maintain
- Heavy-duty
- Sturdy roll bar frame (SEH-50X, SEH-80X, SERH-50Z)

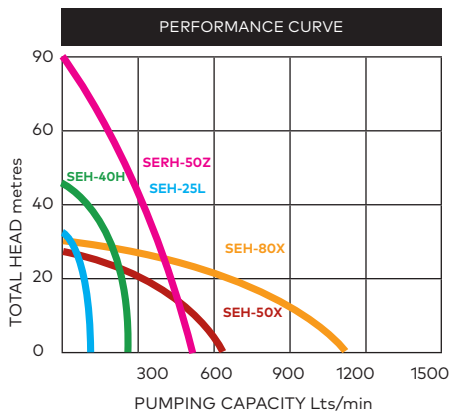

\*Suitable for pumping diesel fuel.



### Specifications:


MODEL	WEIGHT	DIMENSIONS L x W x H	MAX FLOW	TOTAL HEAD	ENGINE
SEH-25L 1" (25mm)	5.5kg	375 x 243 x 320mm	115L/min	32m	HONDA GX25 Petrol Recoil Start
SEH-40H 1.5" (40mm)	12kg	455 x 302 x 447mm	280L/min	43m	HONDA GH50 Petrol Recoil Start
SEH-50X 2" (50mm)	21kg	483 x 375 x 376mm	640L/min	27m	HONDA GX120 Petrol Recoil Start
SEH-80X 3" (80mm)	28kg	525 x 389 x 463mm	1100L/min	27m	HONDA GX160 Petrol Recoil Start
SERH-50Z 2" (50mm)	34.6kg	570 x 450 x 468mm	500L/min	90m	HONDA GX200 Petrol Recoil Start

## Diesel Powered

**SEY-50D, SEY-80D, SEY-100D**

### Features:

- Yanmar diesel engine
- Compact & lightweight
- Easy-to-maintain
- Heavy-duty
- Sturdy roll bar frame
- Self priming

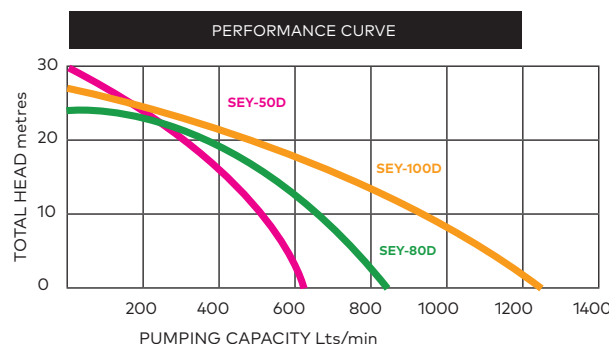

### Specifications:

MODEL	WEIGHT	DIMENSIONS L x W x H	MAX FLOW	TOTAL HEAD	ENGINE
SEY-50D 2" (50mm)	44.7kg	548 x 513 x 698	630L/min	30m	Yanmar L48N6 Diesel Recoil Start
SEY-80D 3" (80mm)	46.7kg	548 x 513 x 698	880L/min	26m	Yanmar L48N6 Diesel Recoil Start
SEY-100D 4" (100mm)	67kg	668 x 513 x 788	1250L/min	28m	Yanmar L70N6 Diesel Recoil Start

# Semi-Trash Pumps

Light, compact and efficient general purpose pumps for moving clean water or water containing solids up to 20mm in diameter. Heavy-duty, self-priming and easy maintenance.

POWERED by  
**HONDA**




## Petrol Powered

### STH-50X, STH-80X

#### Features:

- Honda GX engine
- Compact & lightweight
- Easy-to-maintain
- Heavy-duty
- Sturdy roll bar frame

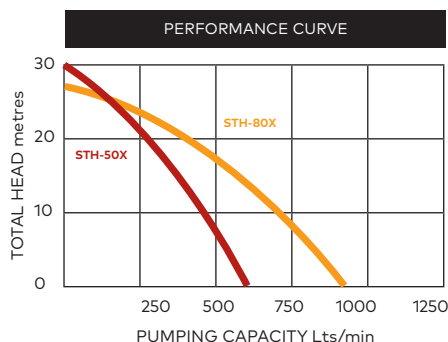

STH-80X  
3" (75mm)

#### Specifications:

MODEL	WEIGHT	DIMENSIONS L x W x H	MAX FLOW	TOTAL HEAD	ENGINE
STH-50X 2" (50mm)	23kg	500 x 395 x 415mm	600L/min	29m	HONDA GX120 Petrol Recoil Start
STH-80X 3" (75mm)	29kg	525 x 389 x 473mm	900L/min	26m	HONDA GX160 Petrol Recoil Start

# Full-Trash Pumps

High performance pumps designed for heavy-duty use on construction sites. Suitable for water containing solids up to 35mm diameter.

## Petrol Powered


### KTH-50X, KTH-80X, KTH-100X

#### Features:

- Honda GX engine
- Compact & lightweight
- Easy-to-maintain
- Heavy-duty
- Sturdy roll bar frame



KTH-80X  
3" (75mm)

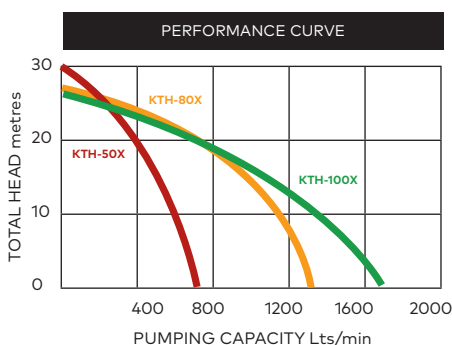


KTH-80D  
3" (80mm)

## Diesel Powered

### KTY-50D, KTY-80D, KTY-100D

#### Features:

- Yanmar diesel engine
- Compact & lightweight
- High self-priming performance
- Long operation time with large fuel tank

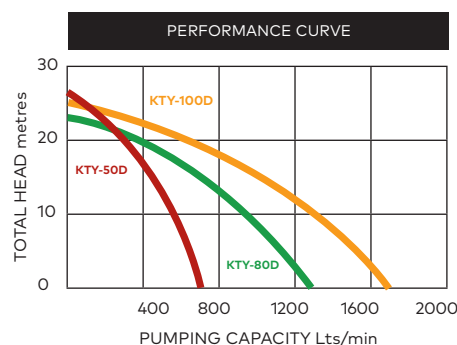

#### Specifications:

MODEL	WEIGHT	DIMENSIONS L x W x H	MAX FLOW	TOTAL HEAD	ENGINE
KTH-50X 2" (50mm)	47kg	646 x 488 x 509mm	700L/min	30m	HONDA GX160 Petrol Recoil Start
KTH-80X 3" (75mm)	62kg	711 x 506 x 570mm	1340L/min	27m	HONDA GX240 Petrol Recoil Start
KTH-100X 4" (100mm)	78kg	780 x 570 x 652mm	1650/min	26m	HONDA GX340 Petrol Recoil Start
KTY-50D 2" (50mm)	63.4kg	708 x 513 x 713	650L/min	24m	Yanmar L48N6 Diesel Recoil Start
KTY-80D 3" (80mm)	82.4kg	723 x 523 x 768	1250L/min	23m	Yanmar L70N6 Diesel Recoil Start
KTY-100D 4" (100mm)	108.5kg	758 x 548 x 778	1600L/min	27m	Yanmar L100N6 Diesel Recoil Start

# Diaphragm Pumps

POWERED by  
**HONDA**



Compact and lightweight pumps for moving water containing sand, stones and sludge. These pumps are self-priming and can be run dry. Heavy-duty construction and mounted in a sturdy roll bar frame.

## Petrol Powered


### KDP-50X, KDP-80X

#### Features:


- Honda GX120 engine with low oil shut off
- Compact & lightweight
- Easy-to-maintain
- Heavy-duty
- Self priming
- Built to run dry
- Wheel kit



KDP-50X  
2"(50mm)

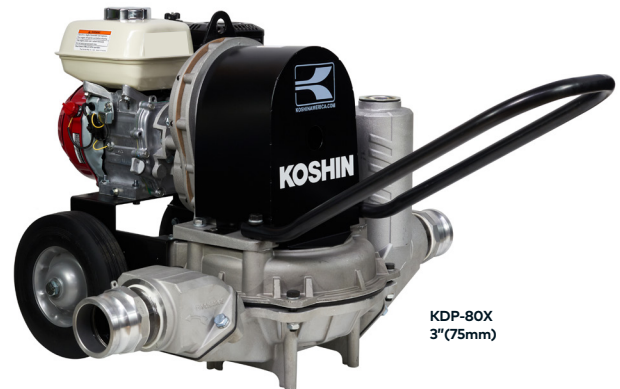

KDP-80X  
3"(75mm)

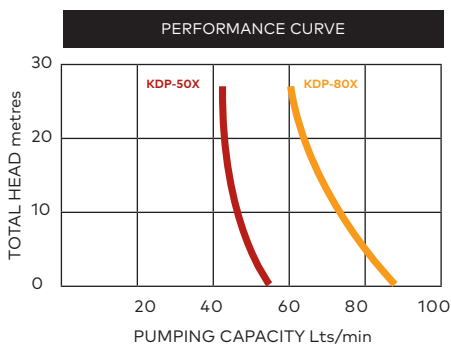

Positive displacement pressure for thicker than water viscosities. Straight line flow design is self-cleaning and reduces clogging. Oil filled gear reduction for quiet operation and less vibration.

#### Specifications:

MODEL	WEIGHT	DIMENSIONS L x W x H	MAX FLOW	TOTAL HEAD	ENGINE
KDP-50X 2" (50mm)	76.2kg	838 x 788 x 788mm	196L/min	7.6m	HONDA GX120 4hp Petrol Recoil Start
KDP-80X 3" (75mm)	78kg	838 x 788 x 788mm	333L/min	7.6m	HONDA GX120 4hp Petrol Recoil Start

#### Submersible Electric:

Suitable for construction sites, underground utility maintenance, light industrial, farm and horticulture, landscaping and flood dewatering uses.



Can reduce water level to 1mm.



PXL52522 1" (25mm)  
Max flow 120 L/min  
Total head 10m  
Single phase

PQ55022 2" (50mm)  
Max flow 220 L/min  
Total head 11m  
Single phase



Float Switch is optional

PBX7-55022 2" (50mm)  
Max flow 330 L/min  
Total head 15m  
Single phase



P315W  
Max flow 690 L/min  
Total head 17m  
Single phase



P322D  
Max flow 700 L/min  
Total head 23m  
Three phase 2.2 kW



P437D  
Max flow 1400 L/min  
Total head 18.5m  
Three phase 3.7 kW



P455D  
Max flow 1900 L/min  
Total head 23m  
Three phase 5.5 kW

#### Flexidrive Submersibles:

Ideal for construction sites. Petrol & diesel models. Standard flexidrive shaft length 7m.



Mikasa  
Drive Unit: GE5L (Petrol)

Pump and drive unit sold separately



Flextool

#### Pumps Accessories:

Suction & layflat hose, 'Camlock' fittings, PVC strainer and hose couplings.



**Auckland, Head Office**  
6-10 Parkway Drive,  
Mairangi Bay,  
Auckland  
(+64) 09 443 2436  
sales@yrco.co.nz

**Auckland, Mt Wellington**  
20L Sylvia Park Road,  
Mt Wellington,  
Auckland  
(+64) 09 553 5470  
salesmtwell@yrco.co.nz

**Wellington**  
8 Broken Hill Road,  
Porirua,  
Wellington  
(+64) 04 212 2456  
saleswell@yrco.co.nz

**Christchurch**  
20 Nga Mahi Road,  
Sockburn,  
Christchurch  
(+64) 03 341 6923  
saleschch@yrco.co.nz



**YR Youngman Richardson**