PRODUCT GUIDE



LIGCHINE

BEYOND LEVEL



LASER GUIDED CONCRETE SCREEDS

LIGCHINE.COM

812-903-4500 · SALES@LIGCHINE.COM

ABOUT

Since its founding in 2007, Ligchine[™] has rapidly expanded its position in the market and offers a full line of automated concrete screeding machines that service flatwork companies from small owneroperated companies to large global concrete contractors. The company's headquarters, engineering and manufacturing are in the United States. In addition to a direct sales force in the US, Ligchine has an extensive network of international dealers and partners to serve customers anywhere in the world.

COMPANY Ligchine Corporation

FOUNDED 2007

OWNERSHIP Privately held

PRODUCT OFFERING Laser-quided concrete screeding machines

PRIMARY OFFICES Darien, WI USA Floyds Knobs, IN USA



DISTRIBUTION

Global coverage through direct sales and dealer network

BEYOND

Superior leveling performance is where it all starts with Ligchine screeds. But to enable our customers to be more competitive and profitable in a tight construction labor market, we must go further.

We must go **BEYOND LEVEL**

SUPERIOR LEVEL PERFORMANCE

Ligchine screeds deliver industry leading Floor Flatness (F_F) and Floor Levelness (F₁) results.

SIGNIFICANT LABOR SAVINGS

Ligchine screeds dramatically reduce dependence on labor, which is often in short supply. A laser-quided concrete screed will help contractors perform more efficiently and profitably by being able to produce and deliver a flatter, level floor. Because of how fast these machines can get the job done. contractors will save money by using a smaller crew.

EFFICIENT OPERATION

Ligchine screeds meet the productivity demands of commercial operations. With maximum coverage per pass and simple, quick movement to the next pass we deliver high screed rates per hour – so you can get the job done and move on to the next one.



LEVEL

EASY TO USE

Ligchine screeds are designed with the operator in mind. Controls are intuitive, allowing operators to quickly become proficient for maximum performance and productivity.

COMPACT AND MANEUVERABLE

Ligchine screeds are developed for real world use. From our smallest to our largest machine, they are engineered to be as compact and maneuverable as possible. Users of these machines say not only does this improve operation on the jobsite, but it also simplifies loading and transport.

HIGH RELIABILITY

Ligchine screeds are engineered to keep you up and running consistently. Downtime, whether planned or unplanned, can have a significant impact on your operations. High reliability and easy-to-perform maintenance are core factors in machine development, from our design concepts to component selection.

24/7 SERVICE AND SUPPORT

Ligchine screeds are backed by a global network of experienced service and support professionals. You've got a job to do – and we are ready to help whenever you need us with 24/7 availability for parts, service, advice or anything else you need to keep your machines operating at peak performance.

HISTORY OF FIRSTS

By designing for constant innovation, Ligchine has led the industry with the most advanced concrete laser-guided screed machines, including the first:

- Wireless remote-controlled screed machine
- Full range of boom-operated screeds to fit every need
- Laser-guided screed machine operated with a 3D mmGPS satellite control system
- Screed head mounted spray bar system to apply retarders or hardeners while screeding
- Boom machine that can be transported with an economical sized truck and utility trailer
- Boom machine with a screed head that can be changed out in minutes instead of hours
- Boom screed light enough to run on heat tubing, rebar and vapor barriers without damage
- With one-touch control that sets vibration, down riggers and auto level system automatically
- Side-shift head allowing easy maneuvering around stick-ups



"LIGCHINE IS A GLOBAL LEADER IN LASER-GUIDED AND 3D GPS/LPS-GUIDED CONCRETE SCREEDS."

PRODUCT PORTFOLIO


The Ligchine $^{\text{TM}}$ product portfolio is comprised of a full line of high-performance boom-operated screeds and a revolutionary drive-in machine. All machines can be custom configured to operate with multiple machine control systems including laser, mmGPS (satellite) and LPS (robotic).

SCREEDSAVER™

BOOM-OPERATED SCREEDS

Ligchine offers a full line of high-performance boom-operated screeds to address the requirements for commercial concrete flatwork. Our broad range of machines ensures the optimal combination of performance and value for every customer, from small owner/operators to large global construction companies.

- · Coverage per screed pass from 120 240 sq. ft. $(12.1 - 22.3 \text{ m}^2)$
- Screed rates of 3,000 10,000 sq. ft./hour (278 m² - 929 m²)
- · 2D and 3D leveling systems
- · Two-wheel drive, zero-turn, (all-wheel drive available on

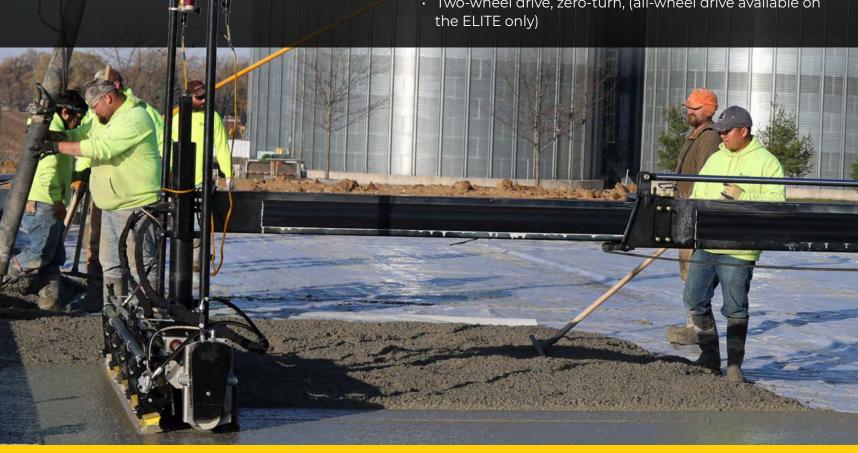

INNOVATIVE LASER-GUIDED CONCRETE SCREEDS

Ligchine offers a full line of innovative boom-operated and drive-in laser-quided concrete screeds, specifically developed to meet the challenges of specification-driven commercial flatwork. Our customers are concrete flatwork contractors of all sizes performing work that demands first-rate Floor Flatness (FF) and Floor Levelness (FL) results.



SPIDERSCREED™

DRIVE-IN SCREEDS

Ligchine SPIDERSCREED drive-in systems are compact, lightweight and maneuverable systems for upper deck concrete and slab-on-grade screeding applications. They offer powerful performance, allowing lower slumps and cooler running at all times.

- · Coverage per screed pass 10 ft. wide screed passes (3.048 m)
- · 2D and 3D leveling systems
- Independent zero-turn drive, up to 90° horizontal drive and lateral drive
- Ultra-low weight, with industry's best power to weight ratio of 55 lbs. (25 kg) per horsepower





CUSTOMER-DRIVEN DEVELOPMENT

At Ligchine, listening to our customers is at the core of our business and they play a vital role in helping shape our products and services to support their performance and business challenges. Our approach of listening to customers has led to a continual flow of industry leading technology advancements and innovations.

PARTNERSHIPS FOR INNOVATION

To drive the speed of innovations, Ligchine has partnered with leading providers of the components, systems and technologies that go into our screeds. These close relationships bring the best minds together and allow Ligchine to deliver advanced new capabilities at a rapid pace.

LEVELING SYSTEMS

Ligchine[™] has partnered with Topcon Positioning Systems to provide the world's most advanced screeding systems to accurately place concrete on grade, slope, dual slope and 3D contours – and deliver significant labor savings.

We offer turn key solutions from low-cost, entry level systems for the contractor just getting started, to total site management of earth moving machines and concrete machines simultaneously from one system.

You also receive the full technical service support of two world-class organizations working together to ensure optimal performance of your system. Our systems also use numerous common components, allowing you to switch back and forth between mmGPS and LPS as desired, as well as providing a path for costeffective upgrades.





3D LPS PAVING SYSTEM


The Ligchine 3D LPS paving system provides a cost-effective entry point for LPS (local positioning system) control for concrete paving. The system utilizes an automatic tracking Robotic Total Station to register and maintain screed position from a machine mounted prism and sonic tracker. Height adjustments are transmitted to and from the screed 20 times per second to maintain accurate specifications on the jobsite.

- · Lowest cost entry point for a 3D paving system
- · World-class accuracy
- · Supports high-volume production
- Operates indoors, outdoors and in areas with obstructed mmGPS satellite reception
- · Open architecture system

3D MMGPS PAVING SYSTEM

The Ligchine 3D mmGPS paving system provides the world's most sophisticated mmGPS (global positioning system) control for concrete paving. The system can simultaneously run a fleet of earth moving machines and concrete screeding machines from a single mmGPS base station. You have the ability to verify your work with the included Topcon Rover, ensuring job site compliance and accuracy at all times.

- Extremely high precision for demanding requirements
- · Controls multiple systems running simultaneously
- World-class accuracy
- · Supports high-volume production
- · Open architecture system

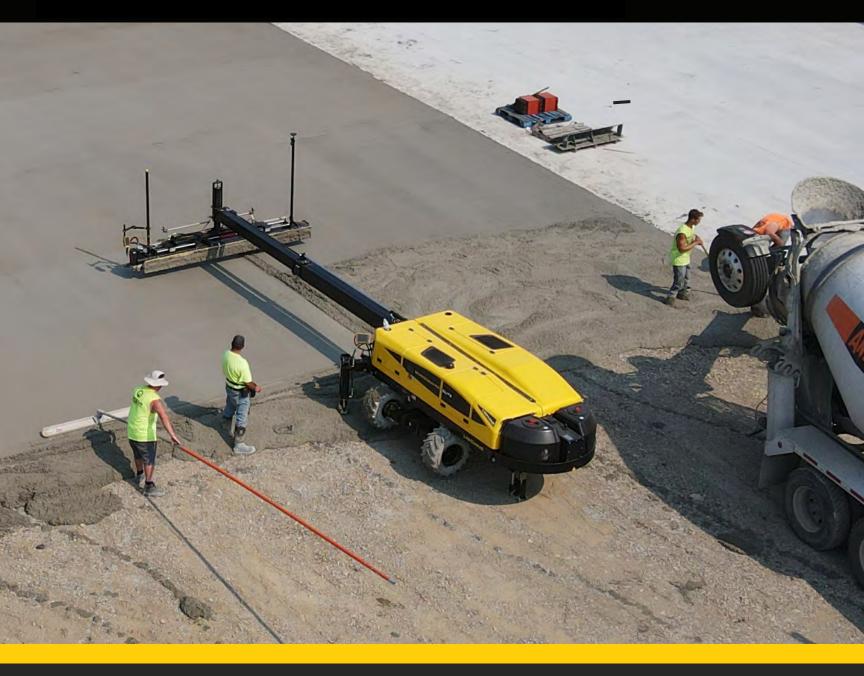

BEYOND LEVEL

SCREEDSAVER ELITE



SCREEDSAVER ELITE

Meet the SCREEDSAVER® ELITE, the best-selling offering in the Ligchine SCREEDSAVER line of innovative, labor-saving machines. The SCREEDSAVER ELITE is loaded with features including all-wheel drive, heavy-duty boom reaching 18 feet, twin 33-gallon on-board fluid tanks and an on-board pressure washer for clean-up. The game changing side-shift head makes it easier to screed around stick-ups in slabs with pinpoint accuracy. The ELITE is the most versatile laser guided screed machine from Ligchine.

Key Features:

The SCREEDSAVER ELITE includes a 11 foot sideshift screed head, selectable all-wheel drive, revised remote control system, and an on-board pressure washer.

Engine:

Kubota V1505, 4-cylinder, diesel engine.

Lighting System:

Front and rear LED pod lighting.

Diagnostic Display:

Readily accessible Parker touch-screen display with full diagnostics capability.

Transport:

Ease of transport with a 3/4 ton pickup truck and trailer.

SCREEDSAVER ELITE



:	
Engine Size	Kubota V1505, 4-cylinder / 3,000 rpm, diesel
Machine Size (retracted)	W-5' 9" (1.79 m) x L-14' 6" (4.45 m) x H-5' 5" (1.67 m)
Machine Weight	6,540 lbs. (Including screed head and full tanks)
Steering System (hydraulic)	Front-wheel steering
Drive System (hydraulic)	4 wheel proportional
Parallel to the Pour Driving Capable	Yes – 360 degree drive frames (zero turn capable)
Lighting System	2 forward and 1 rear facing LED light pods
Machine Operation Control	100% Wireless Remote Control
Coverage per screed pass (no overlap)	216 sq. ft. (20 sq. m)
Side-shift Screed Head Length / Travel Distance	11' (3.4 m) / 22"
Boom Reach	18' (5.5 m)
Self-contained Concrete Additive Sprayer System	Standard
Diagnostics (hydraulic, electrical, engine and laser)	Standard- Parker MD4, 7" touch-screen color display
Transport with Pickup Truck and Trailer	Yes
Machine Length When in Trailer Mode	23' (7.01 m)
Grade/Slope/Dual Slope control (standard)	Topcon LS-B110
Contoured Slope 3D Capable (optional)	Topcon 3D mmGPS Satellite control or LPS Robotic

LIGCHINE.COM

SCREEDSAVER ULTRA PLUS



SCREEDS AVER ULTRA PLUS

Introducing the Ligchine SCREEDSAVER® ULTRA PLUS. Born with a long reach and a wide pass, this machine is built to screed more and screed faster. Complete with an ultra heavy-duty boom reaching 20 feet with an all-new High Performance 12.5' screed head. Powering the ULTRA PLUS is a 45 horsepower Kubota turbocharged diesel engine. For increased maneuverability and traction, the ULTRA PLUS includes selectable four-wheel drive with a 2-speed drive range, and four-wheel independent steering. The ULTRA PLUS features a high-tech elevated operator's platform, including a captain's

The ULTRA PLUS features a high-tech elevated operator's platform, including a captain's seat, twin joystick controls, and a 7" touchscreen control panel– which also serves as a display for the industry-first SCREEDVIEWTM camera system. On board you will find a built in pressure washer for clean-up, two locking toolboxes, and two high-capacity water tanks.

Key Features: The SCREEDSAVER ULTRA PLUS includes a 12.5' High Performance head, SCREEDSHIFT™ pivoting frame techonology, 4 camera SCREEDVIEW™ system, Ligchine Gen 2 Wireless control, and an on-board pressure washer.

Drive & Steering: Selectable 4-wheel drive, with 2-speed drive range, and four wheel independent steering.


Engine: Kubota V1505, 4-cylinder, turbocharged diesel engine.

Lighting System: Front and rear LED pods.

*PRE-PRODUCTION MODEL SHOWN, SPECIFICATIONS SUBJECT TO CHANGE

SCREEDSAVER ULTRA PLUS



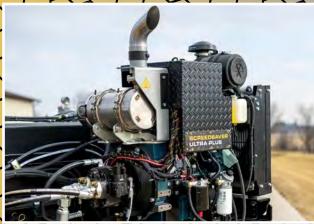





Engine Size	Kubota V1505, 4-cylinder / 3,000 rpm, Turbo-Diesel
Machine Size (retracted)	W - 8'4" x L - 18'8" H - 7'2"
Machine Weight	TBD
Steering System (hydraulic)	4-wheel independent steering
Drive System (hydraulic)	Selectable 4 wheel, with 2-speed drive range
Parallel to the Pour Driving Capable	Yes – 360 degree drive frames (zero turn capable)
Lighting System	2 forward and 2 rear LED light pods
Machine Operation Control	Operator's Platform with Twin Joystick control or 100% Wireless Remote Control
Coverage per screed pass (no overlap)	240 sq. ft.
SCREEDSHIFT™ range of motion	12 degrees total motion: 6 degrees left and right
Boom Reach	20'
Self-contained Concrete Additive Sprayer System	Standard
Diagnostics (hydraulic, electrical, engine and laser)	Dual Parker MD4, 7" touch-screen color display
Machine Length When in Trailer Mode	26'9"
Grade/Slope/Dual Slope control (standard)	Topcon LS-B110
Contoured Slope 3D Capable (optional)	Topcon 3D mmGPS Satellite control or LPS Robotic

LIGCHINE.COM

SCREEDSAVER PRO



SCREEDSAVER PRO

The SCREEDSAVER® PRO comes equipped with a drive system that allows BOTH the upper boom frame AND lower drive frame to independently rotate 360°. With this feature, the PRO set the bar for screed maneuverability. The PRO also features a touch screen display, additive screed head spray bar, and a powerful Kubota diesel engine.

Key Features:

The PRO includes our standard features of wireless remote control, fully automatic operation, 2D laser control and 3D GPS OR LPS control (optional).

Screed Head Length:

Completely automatic laser-guided leveling auger high performance 10' (3 m) screed head is standard. Boom extension of 18' (5.5 m) results in screed rates up to 8,500 sq.ft./hour (789 m2).

Engine:

Kubota V1505, 4-cylinder / 3,000 rpm, diesel

Lighting System:

Bright LED lighting system.

Diagnostic Display:

Readily accessible Parker touch-screen display with full diagnostics capability.

SCREEDSAVER PRO



Engine Size	Kubota V1505, 4-cylinder / 3,000 rpm, diesel
Machine Size (retracted)	W-6' 4" (1.9 m) x L-14' 5" (4.5 m) x H-4' 6" (1.39 m)
Machine Weight	4,870 lbs. (2,209 kg) + screed head
Steering System (hydraulic)	2 Wheel
Drive System (hydraulic)	2-Wheel Proportional Drive
Parallel to the Pour Driving Capable	Yes – 360 degree drive frames (zero turn capable)
Zero-Turn Drive System	Yes
Machine Operation Control	100% Wireless Remote Control
Coverage per screed pass (no overlap)	220 sq. ft. (18.6 m²)
Standard Screed Head Width	High Performance 10' (3 m) SCREEDSAVER
Boom Reach	18' (5.5 m)
Self-contained Concrete Additive Sprayer System	Standard (automatic activation)
Diagnostics (hydraulic, electrical, engine and laser)	Standard – Parker MD4, 7" touch-screen color display
Transport with Pickup Truck and Trailer	Yes
Grade/Slope/Dual Slope control (standard)	Trimble® LR30 Eyes (included)
Contoured Slope 3D Capable (optional)	Topcon 3D mmGPS Satellite control or LPS Robotic

LIGCHINE.COM

SCREEDSAVER MAX PLUS



SCREEDSAVER MAX PLUS

Based off the successful SCREEDSAVER® MAX platform, the sleek SCREEDSAVER® MAX PLUS adds new features such as a built-in diagnostic touchscreen, revolutionary SCREEDSHIFT™ pivoting frame, Topcon® laser receivers, a totally revised wireless remote control system, and a feature packed, quiet Honda gasoline engine.

Screed Coverage: The MAX PLUS offers 17' (5.18m) of boom extension with a 10' (3m) SCREEDSAVER head.

Engine: Honda iGX800 - electronic fuel injection, air cooled, four stroke, 24.9HP (18.5kW).

Drive System: 2 wheel proportional drive with wireless remote control.

SCREEDSHIFT™ Pivoting Frame: Up to 5'3"' (1.6m) of side-to-side screed head movement with a pivoting boom member.

Grade/Slope/Dual Slope Control: Topcon® LS-B110 laser receivers (included).

Ease of Transport: The MAX PLUS can be towed with pickup truck and trailer and pass through 6' door openings.

SCREEDSAVER MAX PLUS



Engine Size	Honda iGX800 - 24.9HP (18.5kW) - Fuel Injected V-Twin
Machine Size (retracted)	W-6' 3" (1.9 m) x L-15' 10" (4.8 m) x H (top of pivot post)-5' 7" (1.7 m)
Machine Weight	4,800 lbs. (2,177 kg)
Steering System (hydraulic)	2 Wheel Steering
Drive System (hydraulic)	2 Wheel Proportional Drive
Parallel to the Pour Driving Capable	Yes - 90° Manual Pivoting Undercarriage Drive Frame with SwingBoom™
Machine Operation Control	100% Wireless Remote Control - Scanreco
Coverage Per Screed Pass (no overlap)	170 sq. ft. (15.79 m²)
Screed Head Width	10' (3 m)
Boom Reach	17' (5.18 m)
Transport with Pickup Truck and Trailer	Yes
Screed Head Options	10' SCREEDSAVER Head, 9' High Performance Head
Grade/Slope/Dual Slope Control (standard)	Topcon® LS-B110 Receivers (included)
Contoured Slope 3D Capable (optional)	Topcon® 3D mmGPS Satellite Control or LPS Robotic
Extras	Tool Box, LED Lighting, Spray System

LIGCHINE.COM

SCREEDSAVER MAX PLUS E



The new SCREEDSAVER® MAX PLUS E builds on the success of the revolutionary SCREEDSAVER® MAX PLUS with an industry-first 100% lithium-ion electric power system. The MAX PLUS E is equipped with EDRIVE, a 48-volt electrically driven hydraulic power unit. The MAX PLUS E features a built-in diagnostic touchscreen, revolutionary SCREEDSHIFT™ pivoting frame, Topcon® laser receivers, and Ligchine Gen 2 wireless remote control system. Now you can safely screed indoors and in climate sensitive environments with the all new MAX PLUS E.

Take your business to the next level—go zero emissions with Ligchine!

Screed Coverage: The MAX PLUS E offers 17' (5.18m) of boom extension with a 10' (3m) SCREEDSAVER head.

Energy Storage: 48V Lithium Ion.

Electric Motor System: 48V 3-Phase AC Liquid Cooled electric motor.

Drive System: 2 wheel proportional drive with wireless remote control.

SCREEDSHIFT™ Pivoting Frame: 12 degrees of total movement, with up to 5'3" (1.6m) of side-to-side screed head movement with a pivoting boom member.

Grade/Slope/Dual Slope Control: Topcon® LS-B110 laser receivers (included).

Ease of Transport: The MAX PLUS E can be towed with pickup truck and trailer and pass through 6' door openings.


SCREEDSAVER MAX PLUS E



Electric Motor System	48v Lithium Ion Battery 48V 3-Phase AC Liquid Cooled Electric motor
Machine Size (retracted)	W-6' 3" (1.9 m) x L-15' 10" (4.8 m) x H (top of pivot post)-5' 7" (1.7 m)
Machine Weight	5000 lbs. (2,177 kg)
Steering System (hydraulic)	2 Wheel Steering
Drive System (hydraulic)	2 Wheel Proportional Drive
Parallel to the Pour Driving Capable	Yes - 90° Manual Pivoting Undercarriage Drive Frame with SwingBoom™
Machine Operation Control	Ligchine Gen2: Wireless Remote Control - Scanreco
Coverage Per Screed Pass (no overlap)	170 sq. ft. (15.79 m²)
Screed Head Width	10' (3 m)
Boom Reach	17' (5.18 m)
Transport with Pickup Truck and Trailer	Yes
Screed Head Options	10' SCREEDSAVER Head, 9' High Performance Head
Grade/Slope/Dual Slope Control (standard)	Topcon® LS-B110 Receivers (included)
Contoured Slope 3D Capable (optional)	Topcon® 3D mmGPS Satellite Control or LPS Robotic
Extras	Tool Box, LED Lighting, Spray System

LIGCHINE.COM

SCREEDSAVER MAX

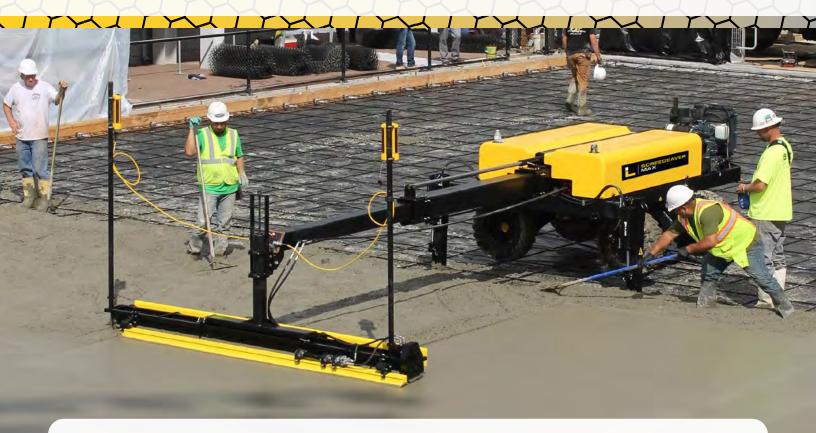

SCREEDSAVER MAX

The SCREEDSAVER™ MAX is the best return-on-investment screed machine available given its high-production output and value price point. Like every SCREEDSAVER model, the MAX includes our standard features of wireless remote control, fully automatic operation, 2D laser control and 3D GPS OR LPS control (optional). Contractors can haul it with a pickup truck and trailer combination. The MAX boasts FL numbers that can only be achieved by a boom operated screed.

Screed Coverage: The MAX offers 200 square feet of coverage per pass with a 18' boom combined with a 10' SCREEDSAVER head.

Engine: Kubota D902 25 hp Tier 4 Diesel

Drive System: 2 wheel proportional drive with wireless remote control.

Grade/Slope/Dual Slope Control: Trimble® LR30 Eyes (included).

Ease of Transport: The MAX can be towed with pickup truck and trailer and pass through 6' door openings.

SCREEDSAVER MAX



Machine Size (retracted)	W-6' 4" (1.9 m) x L-14' 5" (4.5 m) x H-4' 6" (1.39 m)
Machine Weight	4,380 lbs. (1,987 kg) + screed head
Steering System (hydraulic)	2 Wheel Steering
Drive System (hydraulic)	2 Wheel Proportional Drive
Parallel to the Pour Driving Capable	Yes, 90° Pivoting Undercarriage Drive Frame
Machine Operation Control	100% Wireless Remote Control
Coverage per screed pass (no overlap)	220 sq. ft. (20.44 m²)
Standard Screed Head Width	10' (3 m)
Boom Reach	18' (5.5 m)
Transport with Pickup Truck and Trailer	Yes
Alternate Screed Head Options	10' SCREEDSAVER Head, 9' High Performance Head
Grade/Slope/Dual Slope control (standard)	Trimble® LR30 Eyes (included)
Contoured Slope 3D capable (optional)	Topcon 3D mmGPS Satellite control or LPS Robotic

LIGCHINE.COM

E-Z PLACER



E-Z PLACER

The LIGCHINE E-Z PLACER is a self-propelled concrete placer and line moving system all in a single, portable unit. This all-in-one machine provides industry-leading reach and maneuverability thanks to the 27' of 4" delivery tube, 360° swivel on the main and tip boom sections, and the agile steering system. With a 60" wide footprint and a weight of 4,000 lbs., the LIGCHINE E-Z PLACER provides a compact and versatile package that can efficiently be utilized in most job site applications.

Key Features: The E-Z PLACER features a two-section 27' placer boom with 360° coverage, all wheel drive, all in a compact, lightweight 60" wide footprint.

Engine: 13 HP Honda GX390, gasoline.

Control: Fully remote, single operator. Plus a full set of machine-mounted manual backup controls.

Drive & Steering: All-Wheel Drive with agile All-Wheel Steering.

Delivery Line: 4" connection at rear or side.

Compact Size: 60" width fits through most commercial doorways.

Transport: Easy-to-transport with a 3/4 ton pickup truck and trailer.

E-Z PLACER



LIGCHINE



Engine Size	13 HP Honda GX390, gasoline
Machine Size	W-5' (1.5 m) x L-36' 8" (11.1 m) x H-5' 6" (1.8 m)
Machine Weight	4,000 lbs. (1814kg)
Steering System (hydraulic)	All-Wheel Steering
Drive System (hydraulic)	All Wheel Drive
Overall Placer Boom Reach	27' (8.2m) 360°
Main Boom	16' (5.3 m) Left-Right 360° Swivel
Tip Boom	11' (3.7 m) Continuous 360° Swivel
Machine Operation Control	100% Wireless Remote Control + Manual Backup
Single Operator Control	Yes
Delivery Line	4" (10.2 cm)
Line Pump Connection	4" Rear or Side
Transport with Pickup Truck and Trailer	Yes
Machine Length When in Trailer Mode	27' (8.2 m)

100% MADE IN THE USA

Ligchine machines are proudly designed and built in the USA at our state-of-the-art facility in Darien, Wisconsin.



Proudly Made in the USA.

CONTACT US TODAY!

1-812-903-4500 Sales@Ligchine.com Ligchine.com

HEADQUARTERS

680 Gerry Way Darien, WI 53114 USA

SALES

3429 Knobs Valley Drive Floyds Knobs, IN 47119 USA

FOLLOW US!

FOLLOW US!

G C in

G LIGCHINE

