


## Genie® GS™-3390, GS-4390 &amp; GS-5390



## Specifications

Models	GS-3390		GS-4390		GS-5390	
Measurements	US	Metric	US	Metric	US	Metric
Working height max. <sup>(1)</sup>	39 ft	12.06 m	49 ft	15.11 m	59 ft	18.15 m
<b>A</b> Platform height max.	33 ft	10.06 m	43 ft	13.11 m	53 ft	16.15 m
<b>B</b> Platform height - stowed <sup>(2)</sup>	5 ft 1 in	1.55 m	5 ft 11 in	1.80 m	6 ft 7.5 in	2.02 m
<b>C</b> Platform length - outside	13 ft 0.5 in	3.98 m	13 ft 0.5 in	3.98 m	13 ft 0.5 in	3.98 m
Platform length - Outside, extended single deck	17 ft 6.25 in	5.34 m	17 ft 6.25 in	5.34 m	17 ft 6.25 in	5.34 m
<b>D</b> Platform length - Outside, extended dual deck	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m
<b>E</b> Slide-out platform extension deck - front	5 ft	1.52 m	5 ft	1.52 m	5 ft	1.52 m
<b>F</b> Slide-out platform extension deck - rear	4 ft	1.22 m	4 ft	1.22 m	4 ft	1.22 m
<b>G</b> Platform width - outside	6 ft	1.83 m	6 ft	1.83 m	6 ft	1.83 m
<b>H</b> Height - stowed (folding rails)	8 ft 10.5 in	2.71 m	9 ft 7.5 in	2.93 m	10 ft 4 in	3.15 m
Height - stowed (rails lowered)	6 ft 7.75 in	2.03 m	7 ft 4.75 in	2.25 m	8 ft 1.25 in	2.47 m
<b>I</b> Length - stowed, single deck	12 ft 11.25 in	3.94 m	12 ft 11.25 in	3.94 m	*	*
Length - stowed, dual deck	13 ft 0.5 in	3.98 m	13 ft 0.5 in	3.98 m	-	-
Length - stowed, with outriggers	16 ft	4.88 m	16 ft	4.88 m	16 ft	4.88 m
Length - extended, single deck	17 ft 8.5 in	5.40 m	17 ft 8.5 in	5.40 m	17 ft 8.5 in	5.40 m
Length - extended, dual deck	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m	21 ft 6.5 in	6.57 m
<b>J</b> Width (standard tires)	7 ft 8 in	2.34 m	7 ft 8 in	2.34 m	7 ft 8 in	2.34 m
<b>K</b> Wheelbase	9 ft 4 in	2.84 m	9 ft 4 in	2.84 m	9 ft 4 in	2.84 m
<b>L</b> Ground clearance (center)	1 ft 2 in	36 cm	1 ft 2 in	36 cm	1 ft 2 in	36 cm

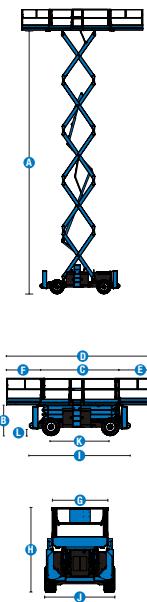

## Productivity

Max. platform occupancy (in/out)	7/7	7/7	4/4
Lift capacity	2,500 lb	1,134 kg	1,500 lb
Lift capacity - extension deck extended	500 lb	227 kg	500 lb
Max. platform drive height	33 ft	10.06 m	43 ft
Drive speed - stowed	5.0 mph	8.0 km/h	5.0 mph
Drive speed - raised	0.7 mph	1.1 km/h	0.7 mph
Gradeability - stowed <sup>(3)</sup>	50%	50%	40%
Turning radius - inside/outside	7 ft 1 in/17 ft 6 in	2.16 m/5.33 m	7 ft 1 in/17 ft 6 in
Lifting speed - raise/lower	45/29 sec	45/39 sec	60/49 sec
Max. outrigger leveling (front to back /side to side)	7°/12°	7°/12°	7°/12°
Tires - Foam-filled rough terrain	12×33 in	30×84 cm	12×33 in
			30×84 cm

## Power

Power	Diesel	Diesel	Diesel
Fuel Tank	20 gal	75.7 L	20 gal
Hydraulic tank capacity	30 gal	113.6 L	30 gal
Weight	11,977 lb	5,433 kg	12,894 lb
Weight with outriggers	13,652 lb	6,195 kg	14,611 lb
Additional weight, optional dual deck	784 lb	356 kg	784 lb
Additional weight, optional super deck	906 lb	411 kg	906 lb
Additional weight, optional generator	105 lb	48 kg	105 lb
Tire load max.	4,734 lb	2,147 kg	4,722 lb
Tire contact pressure - front, platform fully extended	115.5 psi	796 kPa	115.2 psi
Occupied floor pressure	167 psf	8.00 kPa	167 psf

## Sound and Vibration Levels

Sound Pressure level (ground workstation)	< 88 dBA	< 88 dBA	< 88 dBA
Sound Pressure level (platform workstation)	< 78 dBA	< 78 dBA	< 78 dBA
Vibrations	< 8 ft 2 in/s <sup>2</sup>	< 2.5 m/s <sup>2</sup>	< 8 ft 2 in/s <sup>2</sup>

(1) The metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.

(2) Based on RT tires; deduct 2 in/5.8 cm for turf and non-marking tires.

(3) Gradeability applies to driving on slopes and may vary depending on options and machine configurations. See operator's manual for details regarding slope ratings.

(4) Weight refers to standard configuration and may vary depending on options and/or country standards.

(5) Floor loading information is approximate and may vary depending on options and machine configurations. It should be used only with adequate safety factors.

\* GS-5390 comes standard with outriggers. Machine length with outriggers represents overall length.

# Genie® GS™-3390, GS-4390 & GS-5390

## SKU: Standard Model

- GS-3390, Oscillating Axle\*
- **GS439001AD0001:** GS-4390, 2kW AC Generator 110V/60Hz

\* Build to Order

	<b>Option availability</b>	<b>S</b>	<b>S+</b>	<b>BtO</b>
<b>Power</b>				
48.7 hp, 36.3 kW, Deutz D2.9L, Diesel, T4f			✓	
60 hp, 44.7 kW, Ford 2.5L, Gas/LPG	✓	✓	✓	
Cold weather package				○
<b>Platform</b>				
Folding rails, Full-height swing gate	✓	✓	✓	
Single slide-out extension deck	✓	✓	✓	
Dual slide-out extension deck		✓	✓	
Air line to platform				○
2kW AC Generator, 110V/60Hz				○
AC power to platform	✓	✓	✓	
Diamond plate platform deck	✓	✓	✓	
Electronic horn	✓	✓	✓	
Lanyard attachment points	✓	✓	✓	
Platform control guard (PCON)	✓	✓	✓	
Platform control with fault indicator	✓	✓	✓	
Platform load sense system	✓	✓	✓	
Proportional drive and lift	✓	✓	✓	
Self-closing entry gate	✓	✓	✓	
<b>Chassis</b>				
Lift Connect Telematics		○	○	
Lift Connect with Access Manager upgrade		○	○	
Biodegradable hydraulic oil			○	
Cold weather hydraulic oil			○	
High floatation, foam-filled tires		○	○	
Rough Terrain, foam-filled tires	✓	✓	✓	
Rough Terrain, foam-filled, non-marking tires		○	○	
Active oscillating axle			○	
Hydraulic oil cooler			○	
LPG tank 7 gal /33.5 lb (incl. in Ford engine)		○	○	
4 wheel drive	✓	✓	✓	
Auto leveling hydraulic outriggers				○
Descent, tilt and motion alarm	✓	✓	✓	
Dual LED flashing beacons	✓	✓	✓	

## SKU: Standard Model

- **GS539001AF0001:** GS-5390, Auto leveling outriggers
- **GS539001AE0031:** GS-5390, Auto leveling outriggers, 2kW AC Generator 110V/60Hz
- **GS539001AE0030:** GS-5390, Ford Gas/LPG, Auto leveling outriggers

**S** Standard  
**S+** Standard +  
**BtO** Build to Order  
**✓** Standard Features  
**○** Options



4 Wheel Drive



Optional  
Oscillating axle



Slide-Out  
Engine Tray



## Genie Genuine Accessories<sup>(1)</sup>

- Lift Tools Productivity Tools
- Lift Connect Telematics
- Tech Pro Link Handheld Device

(1) More accessories available from Genie Genuine Parts.

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

05/23

**Auckland, Head Office**  
6-10 Parkway Drive,  
Mairangi Bay,  
Auckland  
(+64) 09 443 2436  
sales@yrco.co.nz

**Auckland, Mt Wellington**  
20L Sylvia Park Road,  
Mt Wellington,  
Auckland  
(+64) 09 553 5470  
salesmtwell@yrco.co.nz

**Waikato**  
3/31 Chafer Place,  
Te Rapa,  
Hamilton  
(+64) 07 595 0245  
saleswaikato@yrco.co.nz

**Wellington**  
8 Broken Hill Road,  
Porirua,  
Wellington  
(+64) 04 212 2456  
saleswell@yrco.co.nz

**Christchurch**  
20 Nga Mahi Road,  
Sockburn,  
Christchurch  
(+64) 03 341 6923  
saleschch@yrco.co.nz



**YR** Youngman  
Richardson