

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1018RD (3369RD)

Compliant with AS 1418 · 10 standards



PRODUCT HIGHLIGHTS

Excellent Performance

- Up to 35% gradeability, easily handling outdoor needs
- Stable movement, oscillating working at both stowed and raised position

High Efficiency

- 1.6m(5'3") wide platform with one-way extension platform
- One-click leveling, easy work on uneven road surfaces

Easy Maintenance

- Two-sided hatchback door design, for convenient maintenance
- Swing-out engine compartment for easy maintenance



Standard Features

4WD × 2WS	Oscillating axle	Telematic ready
Non-marking tires	Forklift pockets and lifting points	Battery isolator
Emergency stop	Proportional control	Secondary guarding system
Flashing beacon	Emergency lowering system	White noise alarm
Foldable guardrail	Manual storage box	weight management system

Options & Accessories

Wheel nut indicators	Panel Lifting System	Telematic device
Fire extinguisher/Bracket	Mine spec	Platform work light
Pipe lifting system	AC power to platform	

SINOBOOM™

PARTNERS IN ACCESS™

🌐 **SINOBOOM.AU** | 📞 **03 8905 1550**




HO: BRISBANE – 39 ALTA ROAD, CABOOLTURE QLD 4510 | SYDNEY – 1/3 VOYAGER CT, GLENDENNING NSW 2761
MELBOURNE – 32-34 MARNI, DANDENONG SOUTH VIC 3175

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

1018RD (3369RD)

Compliant with AS 1418 · 10 standards

Model	1018RD (3369RD)
Dimensions	
Max Working Height	12 m (39'4.4")
A Max Platform Height	10 m (32'9.7")
B Max Horizontal Reach	1.5 m (4'11.1")
C Length-Stowed (With outriggers)	3.8 m (12'5.6")
D Width-Stowed	1.78 m (5'10")
E Height-Stowed (Rails Folded)	1.94 m (6'4.4")
E Height-Stowed (Rails Unfolded)	2.56 m (8'4.8")
F Wheelbase	2.28 m (7'5.8")
Ground Clearance	0.22 m (8.66")
Platform Size (L×W×H)	2.8 m×1.6 m×1.1 m (9'2.2"×5'3"×3'7.3")
Performance	
Platform Capacity	450 kg (992 lbs)
Extension Platform Capacity	140 kg (309 lbs)
Max Platform Occupants (Indoor/Outdoor)	4 persons/2 persons
Drive Speed (Stowed)	0 ~ 5.6 km/h (0 ~ 3.5mph)
Drive Speed (Raised)	0 ~ 0.48 km/h (0 ~ 0.3 mph)
Lift Time (Unloaded)	42 s ~ 52 s
Lower Time (Unloaded)	40 s ~ 50 s
Gradeability	35 %
Tilt Rating (Front-to-back)	3°
Tilt Rating (Side-to-side, Outriggers Retracted/Deployed)	2° / 0.8°
Max Outrigger Levelling (Front-to-back)	5.3° (front) / 4.2° (back)
Max Outrigger Levelling (Side-to-side)	11.7°
Turning Radius (Inside/Outside)	2.11 m/4.6 m (6'11.1"/15'1.1")
Tire Spec/Type	26×12-16.5/Solid
Power	
Drive × Steer	4 WD×2 WS
Engine	Kubota D1105-E4B-EU-X1
Hydraulic Tank Capacity	72 L (15.8 gal (UK)/19 gal (US))
Fuel Tank Capacity	48 L (10.6 gal (UK)/12.7 gal (US))
Battery	12 V, 60 Ah
System Voltage	12 VDC
Weight	
Weight (With outriggers/Without outriggers)	4,110 kg (9,061 lbs) / 3,650 kg (8,046 lbs)
Standards Compliance	AS 1418 · 10

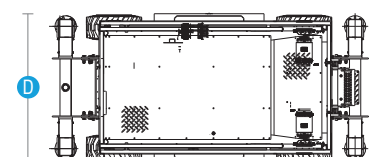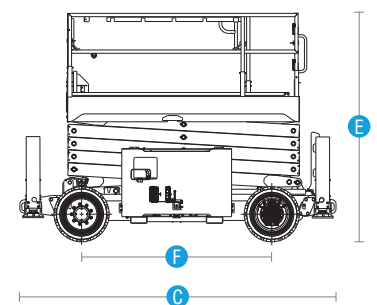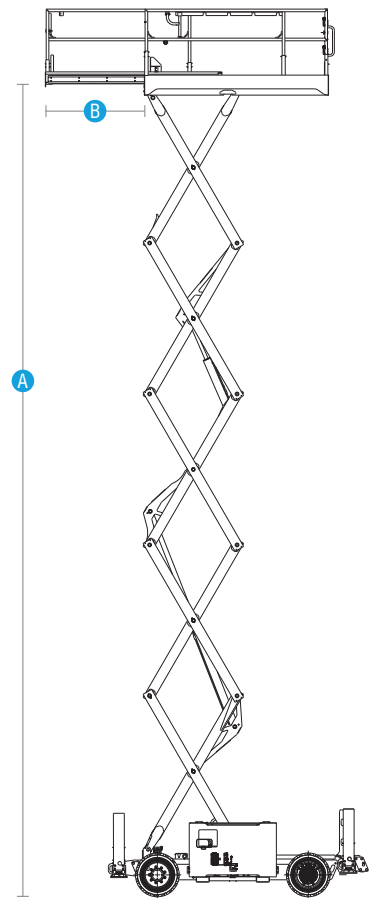

Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

