

PRODUCT HIGHLIGHTS**Excellent Performance**

- Up to 35% gradeability, easily handling outdoor needs

High Efficiency

- 1.6m(5'3") wide platform with one-way extension platform
- One-click leveling, easy work on uneven road surfaces

Easy Maintenance

- Two-sided hatchback door design, for convenient maintenance
- Self-diagnose system display alarm

Green

- Comfortable working environment without noise pollution
- Meet indoor or emissions-critical site requirements

Economical

- Battery quality assurance, low failure rate and reduced maintenance costs compared with diesel power, which reduces overall operating cost






Standard features		
2WD×2WS	Oscillating axle	Telematic ready
Non-marking tires	Forklift pockets and lifting points	Battery isolator
Emergency stop	Proportional control	Secondary guarding system
Flashing beacon	Emergency lowering system	White noise alarm
Manual storage box	Weight management system	Lithium Batteries
Options & Accessories		
Wheel nut indicators	Panel lifting system	Telematic device
Fire extinguisher/Bracket	Mine spec	AGM maintenance-free battery
Pipe lifting system	AC power to platform	Platform work light

ELECTRIC ROUGH TERRAIN SCISSOR LIFTS

1018RE (3369RE)

Compliant with AS 1418 · 10 standards

Model	1018RE (3369RE)
Dimensions	
Max Working Height	12 m (39'4.4")
A Max Platform Height	10 m (32'9.7")
B Max Horizontal Extension	1.5 m (4'11.1")
C Length-Stowed (Outriggers)	3.8 m (12'5.6")
D Width-Stowed	1.77 m (5'9.7")
E Height-stowed (Rail Folded)	1.96 m (6'5.2")
E Height-stowed (Rail Unfolded)	2.59 m (8'6")
F Wheelbase	2.28 m (7'5.8")
Ground Clearance	0.22 m (8.66")
Platform Dimensions (L×W×H)	2.8 m×1.6 m×1.1 m (9'2"×5'3"×3'7")
Performance	
Platform Capacity	450 kg (992 lbs)
Extension Platform Capacity	140 kg (309 lbs)
Platform Allowable Occupants (Indoor/Outdoor)	4 persons/2 persons
Drive Speed (Stowed)	0~6 km/h (0~3.7 mph)
Drive Speed (Raised)	0~0.48 km/h (0~0.3 mph)
Lift Time (Unloaded)	42 s~52 s
Lower time (Unloaded)	40 s~50 s
Gradeability	35 %
Tilt Rating (Front to Back)	3°
Tilt Rating (Side to Side, Outrigger Retred/Extend)	2° /0.8°
Max Outrigger Leveling (Front to Back)	5.3° (front)/4.2° (back)
Max Outrigger Leveling (Side to Side)	11.7°
Turning Radius (Inside/Outside)	2.11 m/4.6 m (6'11"/15'1")
Tire Size/Type	26×12-16.5/Solid foam filled
Power	
Drive × Steer	2 WD×2 WS
Batteries	48 V, 390 Ah
Hydraulic Tank Capacity	72 L (15.8 gal (UK)/19 gal (US))
System Voltage	48 VDC
Weight	
Weight (Outriggers/Without Outriggers)	4,510 kg (9,943 lbs) / 4,050 kg (8,929 lbs)
Standards Compliance	AS 1418 · 10

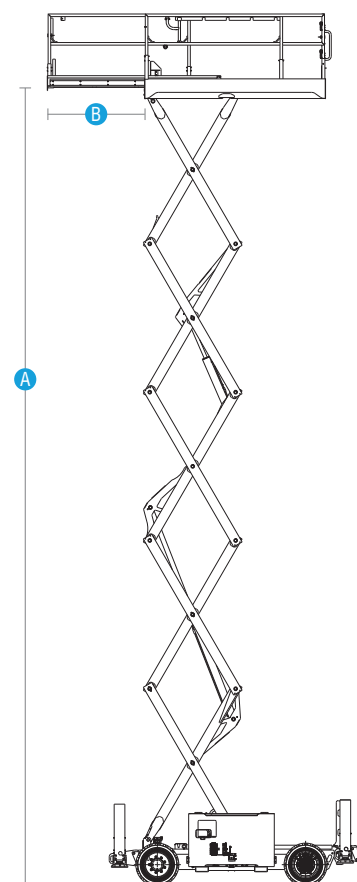

Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

4C+
CELEBRATING
OVER 40 YEARS
IN BUSINESS

**YR Youngman
Richardson**