

PRODUCT HIGHLIGHTS

Electric Control System

- Equipped with the same Rexroth controllers used across Sinoboom boom lifts, this machine delivers on safety and reliability and compliant with EN ISO 13849 and achieving Performance Level D

Compact Design

- With only 1.19m(3'11") narrow chassis and 1.99m(6'6") stowed height, zero tailswing, suitable for working confined spaces

Automatic Pothole Guard

- As booms ascend the pothole guard automatically springs into action, shielding you from uneven ground

5 Inch LED Screen

- Excellent human machine interface experience with a 5 inch LED screen, and one button for fault diagnosis on the screen






Standard Features		
2WD×2WS	AGM maintenance-free battery	Telematic ready
Hydraulic platform leveling	Fault diagnosis system	Battery isolator
Flashing beacon	5-in display screen	Secondary guarding system
Proportional control	Emergency lowering system	White noise alarm
Tilt protection system	Weight management system	Half-mesh for platform
Flashing beacon	Fault diagnosis system	Non-marking tires
Manual storage box		
Options & Accessories		
Mine spec	Lithium Batteries	Telematic device
AC power to platform	Driving light	

ELECTRIC ARTICULATING BOOM LIFTS

AB10ERJN(AB320ERJN)

Compliant with AS 1418 · 10 standards

Model	AB10ERJN(AB320ERJN)
Dimensions	
Max Platform Height	9.62 m (31'7")
Max Working Height	11.62 m (38'1")
Max Horizontal Outreach	6.3 m (20'8")
Max Up and Over Clearance	4.6 m (15'1")
A Stowed Length / Transport Length	5.84 m/4.25 m (19'2"/13'11")
B Overall Width	1.19 m (3'11")
C Stowed Height / Transport Height	1.99 m/2.70 m (6'6"/8'10")
D Wheelbase	1.65 m (5'5")
Ground Clearance (Pothole Guard Stowed/Deployed)	0.07 m/0.03 m (2.8"/1.1")
Platform Size (L×W×H)	1.15 m×0.76 m×1.1 m (45.3"×30"×43.3")
Performance	
Max Platform Capacity	230 kg (507 lbs)
Max Platform Occupants	2 persons
Drive Speed (Stowed)	0 ~ 5 km/h (0 ~ 3.1 mph)
Drive Speed (Raised)	0 ~ 0.8 km/h (0 ~ 0.5 mph)
Gradeability	35%
Turntable Rotation	355° non-continuous
Jib Length	1.42 m (4'8")
Platform Rotation	180°
Horizontal Jib Rotation	180°
Vertical Jib Rotation	136° (Up +64° Down -72°)
Tilt Rating	3°
Turning Radius (Inside/Outside)	1.7 m/3.25 m (5'7"/10'8")
Turntable Tail-swing	0 m
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	22×7×17.75" (Solid non-marking)
Power	
Drive×Steer	2 WD × 2 WS
Batteries (Number×Voltage, Capacity)	8×6 V, 290 Ah (5 hr)/330 Ah (20 hr) AGM
Hydraulic Tank Capacity	20 L (4.4 gal (UK)/5.3 gal (US))
System Voltage	12 V DC
Weight	
Weight	6,760 kg (14,903 lbs)
Standards Compliance	AS 1418 · 10

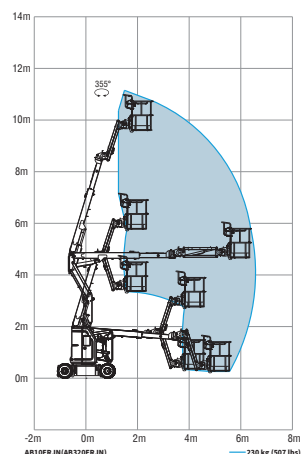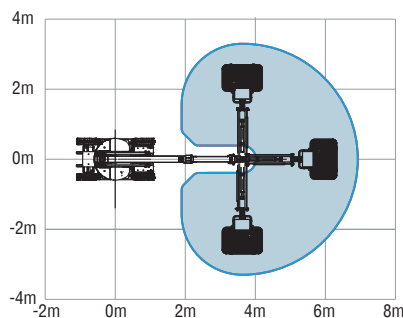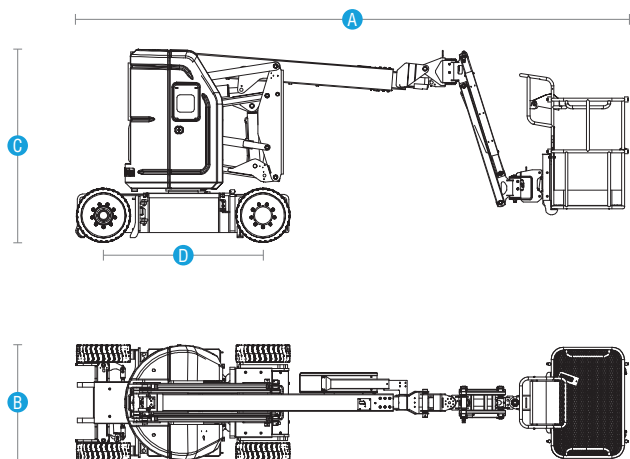

Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

4C+
CELEBRATING
OVER 40 YEARS
IN BUSINESS

**YR Youngman
Richardson**