2025 Product Guide



AUCKLAND







WELLINGTON



AUCKLAND (HEAD OFFICE)

6-10 Parkway Drive, Rosedale, Auckland 0632 PO Box 100-040, North Shore City 0745 Phone: (+64) 09 443 2436 Email: sales@yrco.co.nz

WAIKATO

3/31 Chafer Place, Te Rapa, Hamilton 3200 Phone: (+64) 07 595 0245 Email: saleswaikato@yrco.co.nz

AUCKLAND - NORTHLAND

Construction Equipment Specialist: 021 977 324

AUCKLAND

Construction Equipment Specialist: 021 616 875 Surface Preparation Specialist: 021 813 706 Concrete Product Specialist: 021 501 143

WAIKATO / BAY OF PLENTY Construction Equipment Specialist: 021 725 169

WELLINGTON / HAWKES BAY

Construction Equipment Specialist: 021 729 005 Concrete Product Specialist: 021 610 838

WELLINGTON / TARANAKI

Construction Equipment Specialist: 021 630 701 Concrete Product Specialist: 021 610 838

CHRISTCHURCH NORTH

Construction Equipment Specialist: 021 503 683 Concrete Product Specialist: 021 877 384

CHRISTCHURCH SOUTH

Construction Equipment Specialist: 021 405 180 Concrete Product Specialist: 021 877 384

OTAGO / SOUTHLAND

Construction Equipment Specialist: 021 507 951 Concrete Product Specialist: 021 877 384

NORTH ISLAND Access Equipment Specialist: 021 999 768

SOUTH ISLAND Access Equipment Specialist: 021 820 096

NATIONAL Business Development Manager: 021708 099

AUCKLAND (MT WELLINGTON)

20L Sylvia Park Road, Mt Wellington, Auckland 1060 Phone: (+64) 09 553 5470 Email: salesmtwell@yrco.co.nz

WELLINGTON

8 Broken Hill Road, Kenepuru, Porirua 5022 Phone: (+64) 04 212 2456 Email: saleswell@yrco.co.nz

CHRISTCHURCH

20 Nga Mahi Road, Sockburn, Christchurch 8042 Phone: (+64) 03 341 6923 Email: saleschch@yrco.co.nz



JAY 202

Compaction 4-6
Earthmoving & Compressors7-9
Access Equipment 10-13
Materials Handling 14
Waterblasters 15
Pump 16-17
Hybrid Power System18
Generators 19
Blowers, Dehumidifiers, Engines & Industrial
Lighting Towers, Dust Suppression & Outdoor 21
Concreting Equipment 22-25
Concrete Cutting & Drilling 26-27
Surface Preparation
Dust and Slurry 29
Floor Solutions
After Sales Support

Quality equipment. Built on trust.

Youngman Richardson & Co Ltd is a fully New Zealand owned private company that has been serving the construction, hire and agricultural industries for over 40 years with a customer base throughout New Zealand.

We have a reputation for Quality, Service and Ethics. We pride ourselves on our commitment to customers, product knowledge and expertise with a spare parts service that's "the best in the business".





PROUD TO BE 100% NEW ZEALAND OWNED & OPERATED

YRCO.CO.NZ

XConnect

SITEWISE

Quality equipment. Built on trust.

Our Environmental, Social and Governance strategy to drive sustained momentum in our industries and community **for the next 40 years.**



Industry & community commitment

- Ethical equipment disposals
- Community sponsorship investment plan
- Toitū carbon reduce with 2% target reduction per year



Adding value over the asset lifecycle

- YR Connect, including carbon tracking maintenance
- Genuine spare parts from OEM suppliers
- Maintenance & extension of life



Sustainable, ethical sourcing

- Whole-of-life resilience & sustainability are prioritised investment criteria for us
- Transitioning our equipment to more renewable energy options over the next 10 years and beyond
- Instil a proactive human rights policy
- Suppliers that have ethical business practices

COMPACTION









Mikasa Vibration Rollers

Double drum drive and double drum vibration. Built-in water tank, hydrostatic drive and spray bar.



MRH-700GS Weight 680kg Drum (mm) 355Dia 650W Cent. force 10.8kh Honda GX390 13hp 10.8kN

Tracgrip **Pedestrian Roller**

TG45S

Weight

Single drum. Efficient performance & easy maintenance. Non-corrosive water tank.



Easi-load Tilt-deck Trailers

Custom tilt trailer to suit Mikasa Reversing Plates.





COMPACTION

Mikasa Reversible Plate Compactors Ideally suited for civil

engineering, construction and drainage contractors as well as the hire industry. They offer a high compaction capacity, travel speed and feature a full hydraulic reversing mechanism.





POSITIVE THROTTLE ENGAGEMENT Exclusively on diesel machines. Guarantees full throttle operation and maxmum compaction by eliminating midpoint RPM.



DIGITAL DISPLAY

Hourmeter - allows accurate tracking of hours and maintenance intervals. **Tachometer** displays engine RPM while in operation.



EASY SERVICE Serviceability with easy access to all maintenance points.

OPTIONAL FEATURE:



COMPACTION METER

The new Mikasa 'Compass' compaction meter is a measuring and display system for continuous compaction control - located in clear view of the operator. Available on 308,408 & 508 Models.



Weight148kgPlate (mm)700x430Cent. force27.0kNHonda GX2006.5hpStartRecoil



WVH508 Series (Diesel)Weight536kgPlate (mm)900x500/650Cent. force65.0kNHatz11.9hp DieselStartElectric/Recoil



2 Year (24 Months) Warranty* on Mikasa & HATZ Engines based on service & maintenance contract. * Conditions apply.



 MVHeR60 (Battery)

 Weight
 81kg (incl battery)

 Plate (mm)
 480x350

 Cent. force
 12.0kN

 Honda GXE2.0H
 1.8kW



 MVH208 Series (Petrol or Diesel)

 Weight
 240kg

 Plate (mm)
 720X500

 Cent. force
 37.0kN

 Hatz/Yanmar
 6.7hp

 Start
 Electric/Recoil



MVHR60H A (Petrol) Weight 68kg Plate (mm) 480x350 Cent. force 15.0kN Honda GX120 4hp Start Recoil *Comes with water tank



 MVH308 Series (Petrol or Diesel)

 Weight
 325/360kg

 Plate (mm)
 860x445/600

 Cent. force
 45.0kN

 Hatz/Yanmar
 9.0hp

 Start
 Electric/Recoil



 MVH128GH (Petrol)

 Weight
 122kg

 Plate (mm)
 590x400

 Cent. force
 23.5kN

 Honda GX160
 5.0hp

 Start
 Recoil



 MVH408 Series (Diesel)

 Weight
 423kg

 Plate (mm)
 900x500/650

 Cent. force
 55.0kN

 Hatz/Yanmar
 9.0hp Diesel

 Start
 Electric/Recoil

COMPACTION



ARX12-2 / ARX16-2 Working Width 820 - 900mm Operation Weight 1475 - 1520kg





ARX16K / ARX23-2C / ARX26-2C ARX40-2C / ARX45-2C Working Width 900 - 1380mm Operation Weight 1460 - 4320kg

Light Tandem Articulated Vibratory Roller

Ammann tandem rollers in the 1-4.5 tonne class offer full-flush compaction both sides of the machine, double drive front and rear as well as double vibration at front and rear. The dash-2 series of light tandem rollers features a quick drum adjustment from offset to in-line configurations. Rollers that are offset are able to work close to obstructions.

Battery Powered Light Tandem NEW Articulated Vibratory Roller

The Ammann fully electric drive 2.6 ton Light Tandem Roller can operate for up to 8 hours and sometimes beyond – without charging. This unit is extremely quiet, does not produce emissions and can work indoors. Maintenance-free parts together with low service intervals increase machine profitability.

Working Width 1240mm Operation Weight 2770kg EARX

Heavy Articultated Tandem Roller

Ammann ARX tandem rollers were developed to meet the demand of today's road building projects worldwide to compact asphalt sub-layers and wearing courses as well as gravel and soil. The unique design reflects the combination of high-performance compaction as well as operator-safety and comfort.

AV70X / ARX90 / ARX110 / AV130X Working Width 1450 - 2100mm Operation Weight 7365 - 13080kg







ARR 1575 Working Width 640 - 850mm Operation Weight Max 1450kg Remote Controlled

Rammax Trench Rollers



MMANA

The articulated trench rollers produced by Rammax are developed for various applications on heavy terrains. Can navigate around manholes without difficult steering.

Ammann ARR 1575 Trench Roller has an optional extra intelligent compaction system. The system, ACEecon, eliminates guesswork by measuring compaction progress in real time. The information is communicated to the operator via an LED display on top of the machine.

Infra-red remote control – machine automatically stops without direct visibility, automatically stops outside 2-20M.

Paver

The AFW150-2 is a unique machine that has no competitors in the market. The tight turning radius and clearance width make it ideal for paving footpaths and handling repair work in narrow surroundings. The paver is easy to transport and allows a fast set-up on the jobsite.



ART280

Ammann's new tyred roller features a new cab and a unique ballasting system that can be quickly and significantly adjusted.



Heavy Single Drum Roller 7-22t

The extraordinary safety, excellent compaction performance and modern design of heavy-weight Single Drum Rollers guarantee high efficiency and best results even under the toughest working conditions.

ARS70 / ARS110 / ARS130 ARS150 / ARS170 / ARS200 ARS220

Working Width 1680 - 2240mm Operation Weight 6490 - 26060kg (max.)

hce and /y-weight parantee st results st 150 /



EARTHMOVING

Vac-Ex Vacuum Air Excavation Systems

Vac-Ex tracked dry air excavation systems are ideal for safe exposure of live utilities beneath the ground. Soil can then be reused onsite or removed for safe disposal.





T-VAC Track 2 Skip Capacity Unit Weight 1.0 m3 2750ka 2580mm 150mm / 6" Max Tipping Hose inlet

Lightweight, manoeuvrable and simple to use. Capable of excavating most types of ground (wet or dry) by using compressed air or optional high-pressure water. Ideal for access where space is limited.





AIR-VAC Track Skip Capacity 0.2 m3 Unit Weight 1650kg 1650kg Max Tipping Hose inlet 2540mm 125mm / 5"

Versatile, mobile and simple to use. Compact and powerful, ideal for tight urban working and is ideal for narrow trenching.



T-VAC Trailer Skip Capacity 1.0 m3 Unit Weight* 1950kg Max Tipping** 3150mm 150mm / 6" Hose inlet

The T-VAC 2 is powerful, compact and is mounted on a trailer for flexibility and affordability. It delivers more power with a host of additional features.

*Including optional TV2-ARM-K2 **Can vary depending on support leg extension and towing hitch height.



360-VAC Skip Capacity Unit Weight 0.35 m3 1800kg Suits Excavator Weight Hose Inlet 15-25T 150mm / 6"



The versatile 360-VAC attachment is attached to an digger hitch to excavate with small narrow footprint, allowing access into the tightest environments.



Leading tool for ground decompaction and clearance of soil from underground assets. Enables safe, effective excavation of buried fibre optics, gas, water or electric.

EARTHMOVING



Mini Excavators Reliability, greater visibility, lower noise levels and ease of operation are key benefits of the KATO Mini excavator range.

HD17VXE

Engine



HD12VXE Operating Weight Max Digging Force Engine





HD25V5 Operating Weight 2555kg 19.6kN (2000kgf) Max Digging Force KUBOTA D1305 Engine Options - Cabin or Rops Canopy



Operating Weight 5215kg 31.0kN (3160kgf) KUBOTA V2403-CR Max Digging Force Engine Options - Cabin or Rops Canopy - Steel or Rubber Tracks





Operating Weight 1690kg 15.7kN (1600kgf) YANMAR 3TNV70 Max Digging Force



HD30V5 Operating Weight 3105kg 29.1kN (2970kgf) Max Digging Force YANMAR 3TNV88 Engine Options - Cabin or Rops Canopy - Steel or Rubber Tracks



HD19VXT Operating Weight 1745kg 15.7kN (1600kgf) YANMAR 3TNV70 Max Digging Force Engine



HD19VXT Cabin Operating Weight Max Digging Force Engine

1905kg 15.7kN (1600kaf) YANMAR 3TNV70



HD35V5 Operating Weight 3525kg 29.1kN (2970kgf) Max Digging Force YANMAR 3TNV88 Engine Options - Cabin or Rops Canopy - Steel or Rubber Tracks



HD45V4 Operating Weight 4855kg 31.0kN (3160kgf) Max Digging Force KUBOTA V2403-DI Engine Options - Cabin or Rops Canopy - Steel or Rubber Tracks



HD60V5 Operating Weight Max Digging Force

5575kg 41.2kN (4800kgf) KUBOTA V2403-DI Engine Options - Cabin or Rops Canopy - Steel or Rubber Tracks



HD85V5 Operating Weight Max Digging Force Engine Options - Steel or Rubber Tracks

8440kg 55kN (5608kgf) YANMAR 4TNV98C

Hydraulic Breakers and Accessories

Fine silenced "X" series and close type hydraulic breakers. 1X - 23X Fine number 120kg - 1760kg Weight Suits Excavator 0.8-1.5 Tonnes - 22.0-28.0 Tonnes











Kato Mini Dumpers

KATO Tracked Dumpers are ideal for transporting and moving various kinds of materials around the work yard and in places that are difficult to access.



CARRY 105.LS Capacity 500kg Unit Weight 345kg Honda GX200 6.5Hp C/w Loading shovel Available without loading shovel



CARRY 107.HTLS Capacity 700kg Unit Weight 665kg Honda GX390 13.0Hp C/w Loading shovel Available without loading shovel



CARRY 110 Capacity 1000kg Unit Weight 930kg Yanmar Water Cooled 14kW



CARRY 150/230 Capacity 1500kg/ 2300kg Unit Weight 860kg/ 2285kg Kubota D902 20.0 Hp / V1505 24.8 Hp

Tufftruk Mini Dumpers

Tufftruk Wheeled Dumpers are very compact 4x4 mini dumpers with an articulated chassis to navigate bends and corners with ease.



TUFEB500PNZ Capacity 500 kg Unit Weight 240 kg Battery powered 2x12v TUFEB500PPTNZ Capacity: 500 kg Unit Weight: 240 kg Battery powered 2x12v Electric tip

Tuffbelt Portable Conveyor

Tuffbelt mini-maxi conveyor belts are excellent for transporting building materials and especially handy for areas with narrow access.



Atlas Copco Compressors

Atlas Copco single stage, silenced diesel compressors are ideal to use with the Vac-Ex air excavation systems.



U75 PSI 100 Compressor Air Delivery 75 cfm / 2.1m³/min Full load RPM 3400

U110 PSI 100 Compressor Air Delivery 100 cfm / 2.8m³/min Full load RPM 3600



Denyo Compressors

Easy to transport, efficient to maintain, are weatherproof and environmentally friendly.

DU-190

Single Stage, Oil Injected Screw Compressor Compressor Rated Pressure Mpa(psi) Bar 7, Psi 100 Compressor Air Delivery m³/min(cfm) 4.87/ 172



ACCESS EQUIPMENT



AWP Work Platforms

Ideal for high ceiling lighting and general maintenance duties. Can work at height from 8.12m - 14.29m.

Madali	AVA/D2/ ACC		
Weight	307kg	330kg	352kg
Power (Battery)	12V	12V	12V
Lift capacity	159kg	159kg	159kg
Platform height	6.1m	7.5m	9m
Working height	8.1m	9.5m	11m
Model:	AWP20ACS	AWP25ACS	AWP30A

Model: Working height Platform height Lift capacity	13.1m 11.1m 159kg	AWP40ACS 14.3m 12.3m 136kg
Power (Battery)	12V	12V
Weight	461kg	472kg



Electric Scissor Lifts

Nothing beats a Genie scissor lift for performance and safety.

Model:	GS1432m	GS1932m	GS1932XH	Genie (15-1432m
Working height	6.3m	7.55m	7.85m	
Lift capacity	227kg	227kg	227kg	
Power	Electric	Electric	Electric	
Weight	900kg	1306kg	1555kg	
Model:	GS2632	G53232	GS2646XH	
Working height	9.96m	11.78m	9.96m	
Lift capacity	227kg	227kg	454kg	
Power	Electric	Electric	Electric	
Weight	2145kg	2434kg	2294kg	
Model:	GS3246XH	GS4046	GS4655	4
Working height	11.78m	13.89m	15.95m	
Lift capacity	318kg	350kg	350kg	
Power	Electric	Electric	Electric	
Weight	2776kg	3117kg	3701kg	

Telescopic Boom Lifts The ultimate in reach and range.

Fast set-up and state-of-the-art features.

Model:	S-45XC	S60FE	S-65TRAX	S-65XC
Working height	15.56m	20.6m	21.8m	21.81m
Lift capacity	300/454kg	300kg	300/454kg	300/454kg
Power (Diesel)	48hp	24.8hp	48hp	48hp
Weight	7167kg	8063kg	13,098kg	11,412kg
Model:	S80 J	S80JTRAX	S-85XC	SX-125XC
Working height	26.51m	26.51m	27.91m	40.1m
Lift capacity	300kg	300kg	300/454kg	300/454kg
Power (Diesel)	48hp	48hp	74hp	74hp
Weight	11113kg	13421kg	17,917kg	20,700kg
Model:	SX-135XC	SX-150	SX-180	
Working height	43.15	48.02	56.86m	
Lift capacity	300/454kg	340kg	340kg	
Power (Diesel)	74hp	74hp	74hp	
Weight	21,273kg	22,657kg	24,948kg	

Articulating Boom Lifts

Self-propelled. Smaller models for tight access, up to large models with extended reach and jib options.

Model:	Z30/20NRJ	Z34/22N	E
Working height	10.89m	12.52m	
Lift capacity	227kg	227kg	
Power	Electric	Electric	
Weight	6605kg	5178kg	
Model:	Z34/22IC	Z40/23NRJ	Z45XC
Working height	12.54m	14.32m	15.86m
Lift capacity	227kg	227kg	300/454kg
Power	Electric	Electric	Electric
Weight	4494kg	6940kg	7421kg
Model:	Z-45FE	Z45/25JDC	251/30JRT
Working height	15.94m	15.94m	17.59m
Lift capacity	300kg	227kg	227kg
Power	24.8hp	Electric/Diesel48hp	Diesel
Weight	6559kg	7400kg	7394kg

Electric Rough Terrain Scissor Lifts

Superior gradeability, traction control and standard 4WD for diesel models.

DIESEL

Weight

Model: Working height Lift capacity Power (Diesel) Weight	GS2669RTO 10.0m 680kg 24.8hp 3243kg	GS3369RTO 11.96m 454kg 24.8hp 3447kg	
Model:	GS4069RTO	GS4390RTO	GS5390RTO
Working height	14.30 m	15.11m	18.15m



Model:	Z60FE	Z62	Z80	ZX135
Working height	20.16m	20.87m	25.77m	43.15m
Lift capacity	227kg	227kg	227kg	272kg
Power	Electric/Diesel	48hp	78hp	74hp
Weight	7756kg	10,052kg	17,010kg	21,092kg

*Weight will vary depending on options.



SINOBOOM

ACCESS EQUIPMENT

Vertical Lift Masts

One man lifter with stable, compact design and Zero Emissions.

Model: Working height (max) Lift capacity (max) Power Weight	VMO4E 5.8m 227kg 24V AGM Battery 785kg	
Model: Working height (max) Lift capacity (max) Power Weight	ML10EJ 10.3m 200kg 6V x 4 Batteries 2678kg	

Electric Scissor Lifts

Elevated work platform design for lifting workers and equipment safely and efficiently.

	,		COLUMN AND
Model:	0407SE	0608ME	\bigotimes
Working height (max) Indoor	6.5m	7.8m	
Working height (max) Outdoor	5.8m	7.8m	
Lift capacity (max)	240kg	230kg	
Power	Electric	Electric	
Weight	880kg	1575kg	
Model:	0808E	0812E*	
Working height (max) Indoor	10.1m	10.1m	
Working height (max) Outdoor	10.1m	10.1m	
Lift capacity (max)	250kg	450kg	
Power	Electric	Electric	
Weight	2265kg	2715kg	
Model:	1012E	1212EK*	1414E Plus
Working height (max) Indoor	12m	13.9m	15.8m
Working height (max) Outdoor	12m	11.9m	10.5m
Lift capacity (max)	320kg	320kg	350kg
Power	Electric	Electric	Electric

2815kg

3210kg

*Extra lift capability

Weight

Electric Scissor Lifts – Rough Terrain

Advanced features to operate on rough terrain with safety and productivity.

Model:	1018RE*	1323RE*	1623RE
Working height (max)	12m	15.1m	18.2m
Lift capacity (max)	450kg	680kg	680kg
Power	Electric	Electric	Electric
Weight	4510kg	8500kg	9250kg

*Extra lift capability



3660kg

Telescopic Boom Lifts -Electric

Access hard-to reach elevated workplaces with zero emissions.

 Model:
 T

 Working height (max)
 2

 Lift capacity
 4

 Power
 E

 Weight
 1

 *Restricted/Unrestricted

TB2OEJ Plus* 22m 454/250/300kg Electric 11950kg



Telescopic Boom Lifts - Diesel

Access hard-to reach elevated workplaces with precision and efficiency.

Model: Working height (max) Lift capacity Power (Diesel) Weight	TB14J Plus* 16.1m 454/340/250kg 18.4kW 7300kg	TB2OJ Plus* 22m 454/300kg 43kW 11900kg	TB26J Plus* 28.3m 454/300kg 54kW 17000kg	M
Model: Working height (max) Lift capacity Power (Diesel) Weight	TB28J Plus* 29.6m 454/300kg 54kW 17000kg	TB32JN Plus* 34.3m 454/300kg 54kW 17460kg	21	
Model: Working height (max) Lift capacity Power (Diesel) Weight	TB42RJ* 43.6m 480/250kg 54/55.8kW 22400kg	TB58RJ* 59.9m 454/300kg 74kW 27600kg	Jaabam -	
*Restricted/ Unrestrict	ed			

Articulated Boom Lifts - Electric

Versatile, highly manoeuvrable and efficient with zero emissions.

Model:	AB10ERJN	AB14EJ
Working height (max)	11.62m	16m
Lift capacity	230kg	230kg
Power	Electric	Electric
Weight	6760kg	71000kg
Model:	AB16EJ PLUS*	AB22EJ PLUS*
Working height (max)	17.8m	23.6m
Lift capacity	454/300/250kg	454/300/250kg
Power	Electric	Electric
Weight	7750kg	10900kg

*Restricted/ Unrestricted

N.B. Engine specifications are approximate and subject to variation.

Articulated Boom Lifts - Diesel

Exceptional reach, high performance and advanced safety features.

Model:	AB10J	AB15J	AB18J
Working height (max)	12.39m	16.7m	20.3m
Lift capacity	250kg	250kg	250kg
Power (Diesel)	18.2kW	36.3kW	43kW
Weight	4986kg	7080kg	10700kg
Model:	AB25J	AB46RJ*	
Working height (max)	26.6m	48.6m	
Lift capacity	230kg	455/225kg	
Power (Diesel)	54kW	97kW	
Weight	17150kg	27300kg	

*Restricted/ Unrestricted



Diesel Scissor Lifts – Rough Terrain

Advanced performance features for the demands of the most challenging outdoor environments.

680kg 34.5kW

8780kg





*Extra lift capability



ACCESS EQUIPMENT





Athena BL-Line

Model: Working height Lift capacity

Engine

Weight

Model:

Engine Weight

Lift capacity

ML-Line

The range of Building Line reaches between 7.9-10m with a maximum capacity of up to 300kg. EVO models can self-level while raised and move at height. There are also Bi-energy options.

Model:	850-HE		an active dyr
Working height Lift capacity Engine Weight	7.8m 250kg Honda 13HP & Electric 240V 1781kg		Model: Working height Lift capacity Engine
Model: Working height Lift capacity Engine Weight	850-BL 7.9m 250kg Honda 13HP & Electric 240V 1990kg		Weight ——— Model: Working height Lift capacity Engine
Model: Working height Lift capacity Engine Weight	850-BL-P 7.8m 250kg Honda 13HP 2050kg		Weight ———— Model: Working height Lift capacity Engine
Model: Working height Lift capacity Engine Weight	850-BL-EVO 7.9m 250kg Diesel 11HP & Electric 240V 2200kg	850-BL Bi-Energy 7.9m 250kg Diesel 11HP & Electric 240V 2200kg	Weight
Model: Working height Lift capacity Engine Weight	870-BL-EVO 79m 250kg Honda 4.8HP & Lithium Batt 2460kg	ery	
Model: Working height Lift capacity Engine Weight	1090-BL-EVO 10m 300kg Diesel 11HP & Electric 240V 2830kg	1090-BL Bi-Energy 10m 300kg Honda 13HP & Lithium Battery 2460kg	Tracked The BT rang self-propelle

JT-Line

The JT-Line tracked self-propelled telescopic boom has +/- 15° longitudinal and lateral levelling. This unit also has an active dynamic bi-levelling chassis.

> JIBBI-1250-EVO 12.2m 230kg Diesel 19.2 HP

JIBBI-1250-LTH

JIBBI-1670-EVO

Diesel 19.2 HF

LI Battery & 240V Electric

2850kg

12.2m

230kg

3600kg

16m

230kg

3850kg



JIBBI-1250-ELC 12.2m 230kg LA Battery & 240V Electric 3600kg

JIBBI U-1570-EVO 15.4m 250kg Diesel 19.2HP & 240V Electric 3600kg

JIBBI-1890-PRIMO 17.9m 250kg Battery Power Pack

5870kg

acked Spider Lift

BT range of spider lifts combine the characteristics of tracked self-propelled aerial platforms with stabilised aerial platforms.







MULTI

LOADER 3.0

3000kg Electric 240V

1470-HE-EVO

up to 6,000kg on slopes equal to 20°.

LOADER 2.5

2500kg Electric 240V

MULTI

14.4m

13400kg

Diesel 11HP & 240V Electric

Multi-Loaders are a range of tracked loader with Bi-Levelling technology capable of transporting

14m 300kg

2460kg



MULTI

2250kg

LOADER 6.0

6000kg Electric 240V



Platform Basket Rail Boom

The Monitor Rail Bom truck is designed specifically for rail maintenance and other passenger maintenance work requirements.

Model: Workina heiaht Lift capacity Engine Weight



Model: Working height Lift capacity Engine Weight

PB RR9/200 9.5m 200kg Kubota 10.5kW 2900kg

12



ACCESS EQUIPMENT

IMER Spider Lifts

From compact models with reduced weight for flexibility in small spaces and easy to transport to larger machines with variable stabilisation. Available in diesel or electric versions (model dependent).

Model:	IM R 13 T	IM R 15 DA	IM R 15 DA LITHIUM
Working height	13m	15m	15m
Lift capacity	230kg	230kg	230kg
Engine	Honda 11HP	Honda 11H	Lithium Batteries
Weight	1500kg	2030kg	2060kg
Model:	IM R 19 SA EVO	IM R 19 SA EVO LI	THIUM
Working height	19m	19m	
Lift capacity	230kg	230kg	
Engine	Honda 11HP	Lithium Batteries	
Weight	2435kg	2470kg	
Model:	IM R23 DA	IM R23 DA LITHIU	M
Working height	22.85m	22.85m	
Lift capacity	230kg	230kg	
Engine	Diesel 21HP	Lithium Batteries	
Weight	3000kg	3000kg	



Platform Basket Spider Lifts

These compact spider lifts are ideal for rough terrain or for indoor use with non-marking tyres. Available in petrol, diesel, electric versions or battery versions (model dependent).

Model:	PB1380 EP	Model:	PB1575 EP	Model:	PB1890 P
Working height	12.99m	Working height	15m	Working height	17.7m
Lift capacity	200kg	Lift capacity	200kg	Lift capacity	200kg
Engine	Honda 11HP/Electric	Engine	Diesel 13HP & Electric	Engine	Kubota 14HP
Weight	1620kg - 1760kg	Weight	1980kg - 2250kg	Weight	2350kg - 2683kg
Also available in	battery version.	Also available in lithium battery a		Also available in lithium battery o	petrol, battery and options.
Model:	PB2095 ED	Model:	PB2210 EVO ED	Model:	PB2714 ED
Working height	19.4m	Working height	21.7m	Working height	27.01m
Lift capacity	250kg	Lift capacity	230kg	Lift capacity	230kg
Engine	Kubota 14HP/Electric	Engine	Kubota 14HP/Electric	Engine	Kubota 22HP/Electric
Weight	2910kg	Weight	3150kg - 3380kg	Weight	5120kg - 5200kg
Also available in	lithium battery version.	Also available in	lithium battery version.	Also available in	lithium battery version.
Model:	PB30T ED	Model:	PB3315 D	Model:	PB43T D
Working height	30.2m	Working height	32.4m	Working height	43.18m
Lift capacity	230kg	Lift capacity	300kg	Lift capacity	300kg
Engine	Kubota 22HP/Electric	Engine	Kubota 26HP	Engine	Kubota 37HP
Weight	4800kg	Weight	6980kg - 7180kg	Weight	12430kg - 12570kg
Also available in	lithium battery version.	Also available in	lithium battery version.	Also available in	lithium battery version.



PB2210 EVO ED



PB2714 ED



PB3315 D

MATERIALS & HANDLING





Super Hoist

A one piece platform that is portable and compact lifting to 3.8m at 136kg and 5.6m at 113kg.

GH3.8 Model: GH5.6 Working height 3.8m Lift capacity 158kg CO₂ CO₂ Power Weight 34kg 37kg





Superlift Advantage

A heavy duty design with a patented telescopic mast system. 5

Model:SLA15Working height4.98mLift capacity363kgWeight151kg	Model:	SLA20
	Working height Lift capacity	4.98m 363kg

Model: Working height 6.46m Lift capacity 363kg Weight 184kg



Superlift Contractor

A heavy duty design with interchangeable load handling attachments.

Model:	SLC18	SLC24
Working height	5.64m	7.32m
Lift capacity	295kg	295kg
Power	Manual	Manual
Weight	139kg	157kg



Material Lifts

A counterbalance weight system capable of lifting weights over obstacles and directly up against walls.

Model:	GL8
Working height	3.06m
Lift capacity	182kg
Power (winch)	-
Weight	66kg

GL10 3.56m 159kg reversible standard 68kg



SLK Series

A counterbalance weight system capable of lifting weights over obstacles and directly up against walls.

SLK20 Model: Lift height 6.5m Lift capacity 360kg 184kg Weight Counterbalance 128kg



WLU Premium

Smaller more compact Wienold Material lift is suitable for tighter sites where larger space is an issue. The chassis is made from solid steel. Max lift height on the WLU/K5P is 5.15m with a capacity of 360kg. *Includes pack weights.

Model: WLU/K5.1 Lift height 5.15m Lift capacity 360kg Weight 287kg

Mini Floor Crane

Classic counterweight with two long, rear-facing arms with counterweights. 900 kg static and 750 kg dynamic payload, which are brought to a hook height of 2.90m.

750/K Model: Lift height Lift capacity Weight



Panel Lift

Fast action, single stage drywall lifter.

Model: Lift height 138.2 3.55m Lift capacity Weight 68kg 45kg



Powered Hand Truck

A universal materials handling solution for one person to lift up to 140kgs.

PHT150 Lift Height Lift Capacity 300mm-1900mm 140kg Weight 44kg



PRO MAKINEX PR



WATERBLASTERS

YRCO Pro Series Waterblasters - Petrol



YR3000AR 2600psi Pressure Max flow 13.5 L/min Honda GX200 6.5hp

Pneumatic tyres.

14m of hose & gun.



Pressure 3000psi Max flow 15.5 L/min







Fitted with Annovi Reverberi

high pressure pumps

YR4000ARE.HR 3700psi 17.5 L/min Pressure Max flow Honda GX390 11Hp

Electric Start ELECTRIC START OPTION

Dual Pressure Washer



MAK.DCP-2200 Weight: 33kg Pressure: 2200psi Rotary Size: 450mm Honda GX200 6.5hp



DPW-4000 Weight: 107kg Pressure: 4400psi (max) Rotary Size: 610mm Honda GX390 13.0hp

Trailerised

YRCO trailerised water blasters are available in a number of configurations.

YR3500AR.HR

500 Litre single axle fully galvanised trailer with low water cut-out. Match up with one of 4 different engine options.



YRPRO Brendon Power Washers

Brendon Power Washers are versatile industrial mobile pressure washers and the ultimate in self-contained cleaning machines available in hot or cold water options.

YRHWBBW35KLN+ES Pressure 3500psi Max flow 12.5 L/min

Tank capacity 700L Hot & cold water Yanmar Diesel Engine

YRBBW30KLN+ES 3000psi 15 L/min Pressure Max flow Tank capacity 960L Cold water Yanmar Diesel OR Honda Petrol Engine available







Choose your Engine and pressure options:



1. Engine: Honda GX390 Recoil start Pressure

- 3700psi Max flow 17.5L/min *High pressure hose reel only
- 2. Engine: Honda GX390 Electric start Pressure 3700psi Max flow 17.5L/min
- 3. Engine: Honda GX390 Electric start Pressure 300psi Max flow 211 /min
- 4. Engine: Honda GX690 Electric start Pressure 4000nsi Max flow 21 L/min
- Engine: Honda IGX800 Electric start Pressure 3600psi Max flow 33 L/min

Trolley Mounted Units



50KPE-VT Pressure 5145psi Max flow 16 L/min Honda V Twin GX630 Engine



Selwood Pumps



FEATURES

- Solids handling to 100mm
- Indefinite dry running
- Vortex style pump
- Environmentally friendly Selprime automatic self priming
- Emission compliant engines • Ease of operation &
- maintenance
- Proven design

Selwood Solids Handling 'S'Range

Specification		S100SS	S160SS	S160SSTP	S200
Capacity	m³/h	165	335	335	635
Total Head	m	21.3	28	28	29
Solids Size	mm	75	100	100	100
Inlet / Outlet	mm	100	150	150	200

APPLICATIONS

- Raw & screened sewage
- Sludge / Slurry
- Water with fine & large solids
- Water with rags & fibres



FEATURES

- Flows up to 600 m³/h
- Indefinite dry running
- Environmentally friendly
- Selprime automatic self priming
- Emission compliant engines
- Ease of operation & maintenance
- Robust construction

Selwood Drainer 'D' Range

Specification		D100SS	D150WP	D160	D200
Capacity	m³/h	120	275	390	600
Total Head	m	26	21	48	37.5
Solids Size	mm	29	45	45	55
Inlet / Outlet	mm	100	150	150	200

APPLICATIONS

- Clean water • Water with fine solids
- Water with larger solids
- Screened sewage

FEATURES

FEATURES

- Flows up to 59m³/h
- Selwood self-priming system
- Ease of operation & maintenance
- Indefinite dry running
- Can be stacked 3 high

• 50mm, 75mm and 100mm

models available

Non turbulent flow

Choice of materials

Non turbulent flow

Choice of materials

• Viscous liquids

• Dry running

• Viscous liquids

• Dry running

FEATURES

• 75mm

Selwood Drainer D75SS D7555

Specification	D75SS	
Capacity	m³∕h	59
Total Head	m	23.5
Solids Size	mm	29
Inlet / Outlet	mm	100

APPLICATIONS Clean water

- Water with fine solids • Water with larger solids
- Screened sewage

Selwood PD75

Specification PD75 Capacity m³/h 30 Total Head m 30.5 Solids Size mm 6 Inlet / Outlet mm 75

APPLICATIONS

- Light and heavy oils
- Sludge / Slurry
- Water with fine solids Petroleum industry
- products

Selwood PD75E Electric Option

Specification		PD75E
Capacity	m³/h	30
Total Head	m	30.5
Solids Size	mm	6
Inlet / Outlet	mm	75

APP	LICA	TIONS	

- Light and heavy oils Sludge / Slurry
- C/W 3 Phase kW motor
- Water with fine solids
- Petroleum industry products
- Data Sheets are available at www.selwoodpumps.com













Our range of portable clean water pumps, trash pumps, diaphragm pumps and flexi-drive pumps have been manufactured to be user-friendly and portable. Water pumps we stock are durable, reliable, and made with quality components for New Zealand's tough working conditions, and are ideal as portable water pumps for contractors and hire companies.

Clean Water

General all-purpose pumps. Sizes 1"(25mm), 2" (50mm), 3" (75mm) and 4" (100mm) Petrol and diesel models available.

Max flow 280L/min

SE100XD 4"(100mm)

Max flow 1100 L/min

Subaru Diesel Engine

Total head 43m

Diesel Powered

Total head 24m



Max flow 115 L/min

Total head 32m



Optional wheel kit on selected items

Full-Trash

KTH-50X 2"(50mm)

Max flow 700 L/min Total head 30m

KTH-80X 3"(75mm)

Max flow 1340 L/min Total head 27m

KTH-100X 4"(100mm)

Max flow 1650 L/min

Total head 26m

For solids 20mm up to 35mm.



Max flow 640 L/min

SEH80X 3"(75mm)

Max flow 1100 L/min Total head 27m

Total head 27m



SEY-50D 2"(50mm) Max flow 630L/min Total head 30m SEY-80D 3"(80mm)

Max flow 880L/min Total head 26m SEY-100D 3"(100mm) Max flow 1250L/min Total head 28m

High-Head For sprinklers & firefighting and water transfer to high places.



SERH-50Z Max flow 500 L/min Total head 90m

Diaphragm

Self-priming. Can be run dry.



KDP-50X 2"(50mm) Max flow 197 L/min Total head 7.6m

KDP-80X 3"(75mm) Max flow 333 L/min Total head 7.6m

Semi-Trash

For solids up to 20mm diameter. Petrol and diesel models.



STH-50X 2"(50mm) Max flow 600 L/min Total head 29m

STH-80X 3"(75mm)

Max flow 900 L/min Total head 26m

Submersibles Electric

Suitable for construction sites, underground utility maintenance, light industrial, farm and horticulture, landscaping and flood dewatering uses.



Can PXL52522 1"(25mm) Max flow 120 L/min Total head 10m Single phase

reduce water to 1mm.



Max flow 690 L/min

Total head 17m

Single phase

P315W



P322D

Max flow 700 L/min Total head 23m Three phase 2.2 kW

PQ55022 2"(50mm)

Max flow 220 L/min

P437D Max flow 1400 L/min Total head 18.5m Three phase 3.7 kW

Switc optional

Float :

PBX7-55022 2"(50mm)

Max flow 330 L/min

Total head 15m

Single phase

P455D Max flow 1900 L/min Total head 23m Three phase 5.5 kW

17



Max flow 650L/min Total head 24m

Max flow 1250L/min Total head 23m KTY-100D 4"(100mm)

Max flow 1600L/min Total head 27m



Flexidrive Submersibles

Ideal for construction sites. Petrol & diesel models. Standard flexidrive shaft length 7m

Mikasa

Drive Unit: GE5L (Petrol) Flexible Drive Pump: WP2L 2"(50mm) Max flow 500 L/min Total head 13m Flexible Drive Pump: WP3LB 3"(75mm)

. 1200 L/min Max flow Total head 23.1m



Flextool

Drive Unit: FDU-P1 : Petrol GX160 3 Dog Drive FDU-D2: Diesel Recoil Start FDU-DE2: Diesel Electric Start

Flexible Drive Pump: 2" FT20180 Max flow 1050 L/min Total head 26.0m









KTY-50D 2"(50mm)

KTY-80D 3"(80mm)

Pump Accessories

Suction & layflat hose, 'Camlock' fittings, PVC strainer and hose couplings.



BATTERY ENERGY STORAGE & HYBRID POWER SYSTEM



Makinex Hybrid Power System

Consists of solar panels, batteries, inverters and a backup diesel generator for where long-term power is of the highest priority. The BESS range is for short term power supply or integrate with existing generator and / or solar systems.

MKH-HPS-15

Engine: Yanmar diesel Generator 4 Pole 15kVA Battery 28kWh Inverter Power 15kVA Solar Power 4kW

MKH-HPS-20

Engine: Yanmar diesel Generator 4 Pole 20kVA Battery 32kWh Inverter Power 20kVA Solar Power 4kW

MKH-HPS-45

Engine: Yanmar diesel Generator 4 Pole 45kVA Battery 64kWh Inverter Power 45kVA Solar Power 8kW

MKH-HPS-60 Generator 60kVA Battery 96kWh Inverter Power 60kVA Solar Power 5kW

MKH-HPS-100 Generator 100kVA Battery 100kWh Inverter Power 100kVA Solar Power 5kW



RESS10 Lithium Battery 10kWh Inverter Power 1 x 10VA 3x32 AMP Single Phase Socket Outlet











Lithium Battery 50kWh Inverter Power 1x 50VA 3x32 AMP Single Phase Socket Outlet

Battery Energy Storage Systems

This Pramac unit allows the storage of energy from multiple sources including generator, solar or the grid.



SX Range Max Output 10kW-20kW Cont. Output 5kVA-10kVA 1 Phase AGM/Li-lon



MX Range Max Output 15kW-60kW

Cont. Output 10kVA-30kVA 1 Phase/ 3 Phase Gel lead acid battery/Li-Ion



LX Range Max Output 40kW-120kW Cont. Output 20kVA-60kVA 1 Phase/ 3 Phase Gel lead acid battery/Li-lon

Mobile Industry Generator

Pramac, reliable, durable and versatile three phase generators are fully bunded generators which are easy to handle and transport with simple servicing.

GPW20Y/FS3A Standby Power: 19.2 kVA Prime Power: 18.3 kVA Tank Capacity: 120L

Prime Power: 60.3 kVA Tank Capacity: 120L Weight: 1220 kg

Weight: 985 kg

GPW65P/FS3A

GPW36Y/FS3A Standby Power: 37.3 kVA Prime Power: 35.5 kVA Tank Capacity: 120L Weight: 989 kg

GPW45Y/FS3A Standby Power: 45.7 kVA Prime Power: 43.4 kVA Tank Capacity: 120L Weight: 1030 kg





BESS100 Lithium Battery 100kWh Inverter Power 2 x 50VA 3x32 AMP Single Phase Socket Outlet



MAK-SPV3 Solar Panel Retrofit Kit suitable for BESS10 Suitable for 6m x 3m site/roof area 26 kWp solar array engineered for safe transport 3.6 kW High Frequency Inverter



Container Top Solar array 5kWp Wind rated for Category A and B AC coupled solar (integrated inverter system) (Container NOT included) Perfect to partner with BESS10



M1R

GENERATORS

YRPRO Series Petrol 2.4kVA to 11kVA. 3-phase model 12kVA. Options: base plate, roll bar frame & pneumatic wheels. Diesel version available.

Max Output 5500W

Cont Output 5000W

SE20E40W.WS.HATZ

Max Output 7700W



A1BFX / A1CFX / A1DFX Max Output 2700W/3300W / 4500W Cont Output 2500W / 3000W / 4100W



M1RW / SE20 Max Output 5500W / 7700W Cont Output 5000W / 7000W



Inverter Type - Super Silent



Max Output 3000W

Cont Output 2100W

Max Output 3200W

Cont Output 2600W

YRG27001

EU32I





YRG4.5IE Max Output 4500W Cont Output 3700W



Max Output 1000W Cont Output 900W



EU70IS Max Output 7000W Cont Output 5500W



SE20E40.3PH.HATZ

Max Output 7600W

Cont Output 6200W

All YRPRO Series Generators

and circut breaker) option.

include an RCD (earth leakage

Max Output 2200W Cont Output 1800W



32 AMP Single Phase

YRPRO Welder/Generator

General arc welding, maintenance and farm use. DC battery charging facility.

Comes complete with welding cables, earth clamp, hand piece and helmet.

ASI 200 Weld capacity 200amps Weight 97kg Max Output: 7.7kVA Cont Output 7.0kVA



Makinex Petrol and Diesel Generators





MKX-10 (Petrol) MKX-16 (Petrol) Max Output 13000W Max Output 8000W Rated Output 6400W Rated Output 12800W



MKX-23 (Petrol) Max Output 18400W Rated Output 18000W



MKX-32 Max Output 28000W Rated Output 25000W

Denyo Soundproof

EU30IS

Ideal for Construction and Hire Solutions

Max Output 3000W

Cont Output 2800W

(Lift bar optional)

- Range 6kVA up to 400kVA
- Single phase and 3-phase models
- Easy starting and quick response
- Weatherproof canopy
- Three phase models suitable for building sites, outdoor events and standby/emergency

SINGLE PHASE THREE PHASE

DA-6000SS Max Output 6.0kVA Cont Output 5.5kVA DCA-10ESXDA Max Output 8.8kVA Cont Output 8.0kVA DCA-18ESXDA Max Output 15kVA Cont Output 14kVA

ULTRA SILENT DCA-25MZ Max Output 22kVA Cont Output 20kVA DCA-45MZ

Max Output 41-49kVA Cont Output 37-45kVA DCA-60USH2 Max Output 55.0kVA Cont Output 50.0kVA

THREE-PHASE

DCA-13ESKDA Max Output 11.5kVA Cont Output 10.5kVA DCA-15ESKDA Max Output 13.5kVA Cont Output 12.5kVA DCA-25ESKDA Max Output 22.0kVA Cont Output 20.0kVA DCA-35SPKDA Max Output 31.5kVA Cont Output 30.0kVA DCA-45LSK2 Max Output 38.9kVA Cont Output 37.0kVA



Soundproof, superior arc performance. DLW-300LSW/400LSW Dual or single Generator 10kVA/15kVA

WELDER /GENERATOR

Weld amps 300/400 Weight 384kg/460kg



BLOWERS, DEHUMIDIFIERS, ENGINES & INDUSTRIAL





Shizuoka



Electric and Hydraulic Breakers

Jackhammer Trolley

JHT 27.5kg Suits most 16Kg Jack hammers





Hydraulic Power Packs

Petrol model shown



Hydraulic Breakers

Shizuoka radiant infra-red, diesel and electric heaters. Heaters Suitable for indoor/outdoor use.





VAL6.PH1 Heat 51,200Bthu/hr Power 230V single phase 18kg Weight

VAL6.KBE1S Heat 112,000Bthu/hr Power 230V single phase

38kg

Weight

VAL 6. FIR1300 Heat 52,000Bthu/hr Kerosene or Diesel fuel 21hr run time / 30L Tank

Hatz Industrial Engines



These heavy-duty diesel engines are economical, robust, reliable and low noise. Safe starting even at extremely low temperatures.

Air-cooled, single and multi-cylinder 2.8kW to 48kW. Some models feature 'Silent Pack' sound proofing for extra quiet use.





Floor sanders



SL7 Edger 180mm Disc speed 3600rpm 14.5kg Weight



Mobile Charging Pod

Mobile powered cabinet to safely store power tool batteries and chargers while charging batteries.



Size (WxDxH): 1480 x 430 x 1370mm Weight: 74kg Locker Dimensions (WxDxH): 580 x 330 x 370mm

YRPRO Blowers & Dehumidifiers

В

Weight (kg)


AP220012

Blade (cm) Air Volume (CF

Weight (kg)

Blowers







SHT-50	
Blade (cm)	35
Air Volume (m³/min)	82
Weight (kg)	19





	30
M)	2200
	12

30

q



AP220013 Ducting in canister 4.5m Weight (kg) 10



300mm Industrial Blower with Ducting (AP220012 + AP220013)

Carpet Dryer



D22 Blade (cm) Air Volume (CFM) Weight (kg)

24 1200/1400/1600 13.5

Dehumidifiers



-ONE45LGR 45L/day Dehumidifying capacity Air Volume (CFM) Weight (kg)



A-ONE90 Dehumidifying capacity Air Volume (CFM) 90L/day 410 Weight (kg) 46









LIGHTING TOWERS /DUST SUPPRESSION / OUTDOOR

Trailerised

Italian designed and manufactured. Portable and stationary models available. Strong and compact structure with stainless steel or galvanised masts. Outrigger for stability.



VT-SOLAR LIGHT TOWER

Mast height Floodlights 6.5m 4xLED Dry wight Lift system 980kg Manual Up to 80km/h 8 x 230Ah Wind stability AGM batteries Battery run time Battery charge time 16h 6h



Stand Alone Towers

Ideal for any application.

CUBE+ PRO up to 8.1m Max height 4 x LED 1175kg Floodlights Dry weight Hydraulic up to 110km/h Lift system Wind stability Engine Cooling Liquid Total run time max. 785h (in hybrid mode) *Incorporates Hyper® LED Technology

*HYPER® LED TECHNOLOGY



Ŵ NEW CUBE+ PRO*

Dust Suppression

DF5000

20 - 30m

Generac Dust Fighter

For demolition and quarry sites. Option of an on-board generator Automatic oscillation: 0° to 300° - Remote Control.

Model
Motor
Coverage
Water Consumption

DF7500 5.5kW, 3-phase 7.5kW, 3-phase 30 - 40m 18.3L/min@10 bar 34L/min@10 bar

DF15000 15.0kW, 3-phase 40 - 50m 43L/min@10 bar



YRPRO Brendon Dust Suppression Unit

Unique water powered dust & odour suppression system used with the YRPRO Brendon Powerwasher.

DT400 Max pressure Coverage 25L/min @250bar

250 Bar Up to 15m away x 8m height



Ideal for finishing large commercial jobs. Well balanced with a low centre of gravity for stability. Pneumatic tyred transport kit. Mechanical & Hydrostatic available.

MQ Whiteman



Ma WHITEMAN, K Flextool Thikasa









Trowel Blades

Top quality MQ Whiteman replacement blades and pans for your walk-behind or Ride-on trowel. Using high carbon, high performance tool steel allows MQ Whiteman to produce a very durable and long-lasting blade.

FINISH BLADES

for walk-behind and ride-on trowels, versatile, cost effective blade for all applications.



COMBINATION BLADES

tor walk-behind and ride-on trowels when quick change ability can be a high priority.



Bull/Channel Floats

Suitable for use with clip together or telescopic handles.

150mm

600mm,

900mm, 1200mm, 1800mm

Width Length NEW

Concrete Placing Rakes

Wheelbarrow

WBLBRW Poly barrow Galvanised Frame

Light weight concrete placing rakes are ideal for spreading and placing concrete and any other soft landscaping mediums.

Hand Trowels

This range of trowels is produced using high carbon steel to optimise blade flexibility and durability and used for smooth finishing of concrete. Available in ProSoft rubber grip and solid moulded plastic handles.

NEW



Handscreed

Flextool Concrete Screed

This aluminium concrete screed with a level vial comes with a clamp-on style handle.



Available in 9 lengths 1200mm (4") / 1500mm (5") / 1800mm (6") 2100mm (7") / 2400mm (8") / 2700mm (9") 3000mm (10") / 3600mm (12") / 4200mm (13.3")

Walking Tools

Walking trowels and walking tools enable the operator to trowel concrete in a standing position.



Float Pan

NFW

Float pans greatly increase the ability to achieve a flatter floor. Multiquip offers a variety of float pan options ranging from Z-Clip to Latch Pin, Domed (Flat) to Superflat.



Edges

The concrete edger trowel is used to create a smooth edge to slab edges.



Finishing Brooms



Bristle type medium Length 750mm / 900mm

Above and below the ground waterproofing products

Fosroc provide a comprehensive range of above and below the ground waterproofing products and systems such as repair mortars, corrosion management, protective coatings and strengthening systems.



CONCRETING EQUIPMENT







Concrete Mixers

Petrol & electric, portable & towable models



YRPRO Fast Mix 150 Power Petrol Capacity 90L Weight 73kg Honda 4hp Engine



YRA3052TPB.GX120 Capacity 100L Honda GX120 4HP Polyethylene Bowl 134kg



NEW

YRPRO Fast Mix 150 Power Electric Capacity 90L Weight 67kg 240V Single Phase Engine



YRA3052TPB.EL Capacity 100L 240V Single Phase Polyethylene Bowl 134 kg

Vibrators Petrol

For footings, foundations & driveways



GE5L Flexible shafts 6m Head size 28, 38, 45 & 70mm Honda GX120 4hp

FT201889-UNIT FVE44-2 GX35 35cc (Hand Held) Engine Head size 44mm Weight 11kg Flexible shaft 540mm



YR350R (petrol)

Honda GX160 5hp

Capacity 350L

Weight 232kg

Road towable

Mix-N-Go P

Petrol

62.63kg

Honda 4hp

85L

Power

Capacity

Weight

Engine

Mix-N-Go Electric 85L

62.63kg

240V Single Phase

OZBP50 Back Pack 1.75hp/2.5hp 38mm/63mm 8.6kg/10.9kg



FT201857-UNIT Heavy Duty Lightweight Frame Quick Connect Honda GX35 C/w 2m/3m Shaft and 33mm/44mm steel head



BPX Heavy Duty Lightweight Frame Swivel Mounted Engine C/w 1M-6.4M Shaft and 35mm-67mm steel head

Vibrators Electric

Mikasa MGX Series Double insulated



MGX28.1 MGX32.2 Shaft 784mm Head 28mm Shaft 2m Head 32mm



YRCO 'Oztec' Electric Series Lightweight. Adjustable shoulder strap.



Shaft lengths 1m, 1.8m, 2.15m, 3.0m, 4.3m, 6.4m Steel heads (dia-mm) 20, 25, 30, 38, 45, 50, 62 Rubber heads (dia-mm) 50, 70

CV-2B Motor 2.0hp CV-3B

Shaft lengths 1.0m, 2.1m, 4.3m, 6.4m Heads (dia-mm) 35, 43, 54, 67

Mortar Mixers

Small and lightweight for mixing products that come in bags



Makinex Mixing Station MS-150 Capacity 150kg . Weight: 33kg







IMER MIX80 Capacity 80L 220V / 1kW Weight: 106kg

IMER MIX120 Capacity 120L 220V / 1.4kW







Multiquip Electric

For medium to high-slump concrete.



Motor 3.0hp



Laser Guided Concrete Screeds

Ligchine innovative laser-guided and 3D GPS/LPS- guided concrete screeds are at the forefront of automated concrete screed machines that service flatwork companies from small owner-operated companies to large concrete contractors. With a square metre rate of 278-929m per hour depending upon the model used.

LS120

 Weight
 2268kg

 Length
 5.1m

 Width
 2.01m

 Screed coverage - 4.88m boom extension with 2.4m Performance Screed Head

 Coverage ner screed page: 111m³

Coverage per screed pass: 11.1m² Honda iGHX800 fuel injected V-twin 24.9hp Comes with: Topcon LS-B200 Receivers

SCREEDSAVER.MAX.PLUS

 Weight
 2177kg

 Length
 4.8m

 Width
 1.7m

 Screed coverage - 5.18m boom extension with 3m Performance Screed Head

 Coverage per screed pass: 15.79m²

 Honda iGHX800 electronic fuel injection 24.9hp

Comes with: 2D Laser leveling for Grade, Slope. Dual Scope Topcon LS-B110 Optional: 3D Systems for Contoured concrete paving – Topcon 3D or LPS robotic. Available with 100% lithium-ion electric power system

SCREEDSAVER.MAX

Weight	1987kg	
Length	4.5m	
Width	1.97m	
Screed coverage: 5.5m boom extension with 3m Performance Screed Head		
Coverage per screed pass: 20.44m ²		
Kubota D902 diesel 25hp		

Comes with: 2D Laser levelling for Grade, Slope. Dual Scope Trimble LR30 Eyes Optional: 3D Systems for Contoured concrete paving – Topcon 3D or LPS robotic.

SCREEDSAVER.ELITE

 Weight
 2966kg

 Length
 4.45m

 Width
 1.79m

 Screed coverage: 5.5m boom extension with 3.4m Screed Head length

 Coverage per screed pass: 20.0m²

 Kubota V1505 diesel 29hp

Comes with: 2D Laser levelling for Grade, Slope. Dual Scope Topcon LS-B110 Optional: Topcon 3D or LPS robotic.

SCREEDSAVER.PRO

SCREEDSAVER.PRO.PLUS

 Weight
 4164kg

 Length
 5.5m

 Width
 1.8m

 Screed coverage 5.5m boom extension with 3.4m Screed Head length

 Coverage per screed pass: 18.6m2

 Yanmar 3TNV80F

 Comes with: 2D Laser levelling for Grade, Slope, Dual Slope Topcon LS-B110

 Optional: Topcon 3D LPS Robotic

SCREEDSAVER.ULTRA.PLUS

 Weight
 5307kg

 Length
 5.73m

 Width
 2.6m

 Screed coverage: 6.1m boom extension with 3.0m Screed Head length

 Coverage per screed pass: 22.3m²

 Kubota V1505 diesel 29hp

 Comes with: 2D Laser levelling for Grade, Slope. Dual Scope Topcon LS-B110.

 Optional: Topcon 3D or LPS robotic.

E-ZPLACER

 Weight
 1814kg

 Length
 11.1m (8.2m in trailer mode)

 Width
 1.5m

 Overall placer boom reach: 8.2m 360°

 Delivery line 10.2cm

 Line pump connection 10.2 Rear or Side

 Honda GX390 13hp

 Main Boom 5.3m left-right 360° swivel

 Tip Boom 3.7m continuous 360° swivel





Husqvarna®

Power Cutters - Battery

Power Cutters - Petrol

Engine

Weight

Blade size

Cut depth



K540i Battery Blade size 267mm Cut depth 100mm . Weight 4.2kg

K970 Chain

Cut depth

K4000 Cut-n-Break

Blade size 230mm (twin)

400mm

8.9kg

WS482 HF (High Frequency)

Power Packs

Use with PRIME[™] product range

20kW

25.8kg

600-1600mm

28kg

Spindle output 13kW

Weight

PP492

Power

Weight

Blade size 600-160 Max. cut depth 730mm

Motor

Weight

Cut depth

230V, 2200W

Engine

Bar size

Weight

94cc 4.8kW

450mm

450mm

9.7kg



NE\A/

K 1 PACE 14 Battery Blade size 361mm Cut depth 145mm Weight 7.4kg *Use with PACE Battery System

Power Cutters - Petrol



K770.14 Engine Blade size 74cc 3 7kW 350mm Cut depth 125mm Weight 10kg



K770.OIL (C/W Oil Guard) Engine Blade size 74cc 3.7kW 350mm Cut depth 125mm 9.8kg Weight

NEW



14''/16' K970.MK3 Engine Blade size 94cc 4.8kW 350/400mm Cut depth 125/155mm 11.0kg/11.6kg Weight

Power Cutters - Rail

NEW

361mm

133mm

9.7kg

K1270.16 Engine Blade size 119cc 5 8kW 400mm Cut depth Weight

145mm 13.7kg

Hydraulic



K2500 Flow rate



8.3kg

Blade size Cut depth Weight



40L/min Flow rate 370mm



K3600.II Ring Blade size Cut depth 270mm Weight 8.3kg

Demolition Robots & Tools





Horizontal Reach 3.6m Power 9.8kW

2.67m 589kg Weight

Forward Reach Horizontal Reach 3.7m Power 18.5kW

3.7m 985kg



Horizontal Reach Power Weight

5.2m 5.5m 27.0kW 2020kg



94cc 4.8kW

350mm

125mm

11kg

K4000 Wet/Vac

Motor

Weight

Wall Saws & Wire Saws

Blade size

Cut depth

230V, 2200W

350mm

125mm

9.9kg

94cc 4.8kW 370mm Engine Blade size Cut depth 270mm Weight 13.8ka



NEW

74cc 3.7kW 230mm (twin) Blade size Cut depth 400mm Weight 9.6kg

Motor

Blade size

Cut depth

Weight

High Frequency



5500W Blade size 400mm

155mm

9.8kg



14'

370mm

270mm

12.4kg



K 1 PACE Rail

Battery

Blade size

Cut depth

Weight 9.7 *Use with PACE Battery System









119cc 5.8kW

450mm

40 9.1kg

450mm

400mm

145mm

21.1kg





K1270 Rail

Blade size

Cut depth

Engine

Weight

















17 K7000 Chain 5500W 5500W Motor

5500W 425mm 325mm

Bar size Weight 13.1kg Cut depth



DXR145

DXR275





DXR315 Forward Reach

WS8

Power

PP70 Power 120-480V Weight 18kg Water Cooled 3 phase or single phase

6kW

PP8 Power Weight

Wire speed -11m Wire length Magazine 10m 100kg Weight

CS10 Wire Saw



120-480V

3 phase or single phase

21kg

26

DXR95 24m/s Weight

Forward Reach



Forward Reach

Horizontal Reach

DXR305

Power

Weight

4.9m

5.2m

1960kg

27.0kW



Max Cut 395mm Max Blade 900mm No overcuts

Cut depth 400mm

WSC40

Power Cutters - Electric



к7000

Motor

Weight

Cut depth

H Husqvarna®

CONCRETE CUTTING / DRILLING

Drill Systems



DM 220

Weight 7.5kg

Power

DM 540i Battery Drill max 75mm Weight 4.9kg

DM 230 Power 1850W Drill max 150mm 1850W Drill max 150mm

Weight 7kg



DM 1 PACE Battery Drill max 400mm Weight 12.3kg



DM 406H Power 9300W Drill max 650mm Weight 16kg



DM 430 3300\W Power Drill max 400mm Weight 14kg

Power 6000W Drill max 600mm

Weight 14kg

DM 700HF



DS 150 Travel (L) 495mm Drill max 150mm Weight 155kg



An extensive range suitable for large jobs such as airports and highways. Smaller service and repair jobs, floors, driveways, new concrete, old concrete and asphalt.

FS 3500.G

Max blade size

Max cut depth

Power

Weight

TS 73 R

Weight

Blade size 230mm

Cut length 730mm

47kg

Power



Power

Weight

TS 60

Power

Weight

Blade size 250mm

Cut length 700mm

47kg

Blade size

Cut depth

15.5kW, 20.8hp

600mm

241mm

1800W, 230V

239kg

Brick Saws



ES 600e

Blade size

Cut depth

Weight

Power

7.5kW

600mm

240mm

178kg



750mm

312mm

450kg

1000W, 230V

27.5kW, 36.8hp

35kW, 48hp

900mm 381mm

680kg

FS 4800D

Blade size

Cut depth

Power

Weight

ES 5000

Blade size

Cut depth

Weight

Power

ES 7000

Blade size

Cut depth

Power

Weight



55kW, 73hp

1000mm

410mm

1032kg

DS 250

Travel (L) 685mm Drill max 250mm Weight 16kg

DS 500 Travel (L) 706mm Drill max 500mm Weight 17.6kg

DS 900 Travel (L) 950mm Drill max 900mm Weight 24kg



VP 200 Vacuum Pump Electric

Husqvarna Soff-Cut Early Entry Saws

800W

41.2kg

Blade size 200mm

Cut length 660mm

The best solution to minimise random cracking.

TS 66 R

Power

Weight



SOFF-CUT 150 3.2kW, 4.5hp 152mm Engine Blade size Cut depth 30mm Weight 39kg



SOFF-CUT 2000e Engine 6.5kW, 9hp 254mm Blade size Cut depth 38mm Weight 144kg



SOFF-CUT 4000 Engine 15.3kW, 20hp 343mm Blade size 70mm Cut depth Weight 191kg



SOFF-CUT 4200 Engine 17.2kW Blade size -76mm Cut depth Weight 214kg

27



SOFF-CUT 5000 Engine Blade size Cut depth Weight 230kg



20.1kW 355mm 101mm

Floor Saws



FS 309 series 6.3kW, 8.4hp Power Blade size 350mm Cut depth 117mm Weight 53ka

FS 400LV series 8.7kW, 11.7hp Power Blade size 450mm Cut depth 162mm . Weight 99kg



2200W, 230V 300mm 82kg



2700W, 230V 350mm Cut depth 100mm Weight 92kg

TS 400 F Power Cut depth 230mm Weight 96kg







3



343mm

TS 350 E Power

Blade size

35kW, 48hp

650mm

374mm

771kg

SURFACE PREPARATION



Grinders Electric powered grinding/polishing machines.





PG280 2.2kW Power Width 280mm 1x280mm Discs Weight 70kg



Weight 110kg



1Ph / 3Ph 2.2kW / 4kW 515mm / 515mm PG510 Power Width 3x230mm / 3x230mm Discs Weight 120kg / 133kg



PG5 4kW Power Width 515mm Discs 2x230mm 183kg Weight



PG6DR

Power

Width

Weight

Discs

12.5kW

591kg

640mm 3x270mm



PG8DR 16.5kW Power Width 800mm 3x270mm Discs Weight 661kg





Discs

HTC270EG 2.2kW 270mm

FZ T-REX

SUPER

1-3mm

coatings

removall

7.5kW 600mm 4x230mm



15 kW 800mm 4x230mm

T-REX

RINGS

1-3mm

coatings

removal

EZ Diamond

Fenix





Edge Tools













Edge Polishing



Series

Edge Preparation

Power Width Discs 1x270mm Weight 103kg

FZ PREP

SERIES

0-2mm

coatings

removal

SF Series premium

concrete polishing pads

PG6XR Power Width Discs Weight 495kg

Husqvarna Tooling & Accessories

Superprep Series for floor removal and floor preparation:

SP Series concrete

polishing tool

FZ T-REX

CLASSIC

1-3mm

coatings

removal

Power Width Discs Weight 645kg

FZ T-REX

coatings

removal

EZ Diamond

Block Series

for over 3mm

DOME



Brushing pads /

cleaning pads

Polishing pads



Floor Preparation Powerful range of floor scrapers, shot blasters, floor scarifiers and floor shavers.

Floor Strippers



BS110 152mm 1.5kW Diameter Power Weight 170kg Single Phase



BS150 152mm 2.2kW Diameter Power 480kg Weight Single Phase



BMS-220ADB

Weight 108 Up to 10 hours

running time

Diameter 152mm

1080kg

1-8DPS30 Diameter Electric up to 23M/min Power Weight Single Phase



1-8DPS55 203mm Diameter 3kW Power 125kg Weight Three Phase



203mm 5.7kW

145kg

1-10DS 254mm 11kW Diameter Power Weight 395kg Three Phase

Plates



1-10DPS75 254mm 7.5kW Diameter Power Weight 211kg Three Phase

BMP-265E 265mm 5.5kW Diameter Power 175kg Weight Three Phase

Floor Scarifier

28





DUST AND SLURRY EQUIPMENT

Dust Collectors Powerful dust collector units.



S11 Phase 1pH Air 200m³/h Rated Input 1.2kW



DE110/DE110S/DE110i Phase 1pH Air 225m³/h / 200m³/h / 180m³/h Rated input 1.1kW / 0.9kW / 0.9kW



DE 120 H PACE Phase 1pH 1pH 220mbar Air Rated input 2.2kW



DE120 Phase Air 1pH 400m³/h Rated input 2.2kW



DE130H Phase 1pH Air 415m³/h Rated Input 3kW



T7500 Phase 3pH 600m³/h Air Rated Input 5.5kW



D60 Phase ЗpН Air 620m³/h Rated Input 5.5kW



80 iD II Phase 3pH Air 700m³/h Rated Input 7.5kW

Н H - Classified - in compliance

with the highest international standard 'H'.

Air Scrubbers



A25 Phase 1pH Air requirement 540/865m³/h Rated Input 0.23kW



A45 Phase 1pH Air requirement 1000/1658m³/h Rated Input 0.53kW

Slurry Collectors



W70P Air 200m³/h Rated Input 1.85kW Internal Slurry Pump System



W70 Air 200m³/h Rated Input 1.85kW

Pre Separators



C3000 Recommended as a supplement to your Hasqvarna dust extrator S26 and S36



C5500 Recommended as a supplement to your Hasqvarna dust extrator T7500, T8600, T10000.

FLOOR SOLUTIONS





Husqvarna Floor Solutions provide durable, easily maintained and versatile concrete floor finishes

Husqvarna Superfloor

Husqvarna Superfloor is a process that includes a complete concept of machines, tools and chemicals. These are used together to create a mechanically refined, polished and diffusion open concrete surface with defined surface metric results, meeting the daily demands on a professional floor surface for industries, retail and the public sector.

It is available in four pre-defined finishes and degrees of aggregate exposure: Platinum, Gold, Silver and Satin.



Scan the QR code to be taken to YR's Archipro Profile





Platinum

Create a smooth, even, highly polished concrete floor with a high level of aggregate exposure and unmatched resistance to wear. Platinum is the most popular surface finish and is a good choice for most applications.



Gold

Create a highly polished concrete floor with a low to medium ("fine) level of aggregate exposure. The floor is not ground as deep as with Platinum but polished to the same gloss. Is a good choice for concrete floors that are already smooth and even.



Silver

Create a matte concrete floor with a high level of aggregate exposure and exceptional strength. Silver is a matte variant of Platinum with the same grinding depth for when you do not need or want a highly reflective floor finish.



Satin

Create a medium gloss concrete floor with a low to medium ("fine) level of aggregate exposure. The result is a floor that offers functionality and low maintenance but is still aesthetically pleasing.

Husqvarna Hipertrowel

As specialist in polishing concrete floors, you sometimes need a faster polishing method than using a planetary floor grinder. The Hipertrowel method is ideal for industrial floors from 500m² and up. Both newly poured slabs and older, pre-existing floors can be processed with the Hipertrowel system. The Hipertrowel system allows you to product a smooth, functional dust-free floor with high reflectivity at the speed of a ride-on finishing trowel.



AFTER SALES SUPPORT



After Sales Support



Servicing

Extend the life of your equipment:

- Rapid response to service milestones, queries and service bookings
- Real-time service alerts (model dependent)
- Meet warranty conditions with scheduled service reminders
- Service and maintenance with our qualified personnel with genuine spare parts





Multi-device access PC + Mobile App

Asset location



Mobile servicing



Anti-theft



Automated service reminders


Security

Protect against theft - options include:

- 24/7 cloud-based tracking and monitoring of your machines (model dependent)
- Rapid response to assist Track & Trace for assets
- Remotely immobilise lost or stolen vehicles for quicker recovery
- Simple geofencing automatic alert messages when your machines cross a virtual boundary you define

Equipment is fitted with a unique QR code that links a particular unit's details with information specific to that serial number and your After Sales Support programme (model dependent). i.e. warranty registration, product specification, familiarisation form, operators manual, parts manual, service manual and service history.

Ensuring customer satisfaction and customer care.

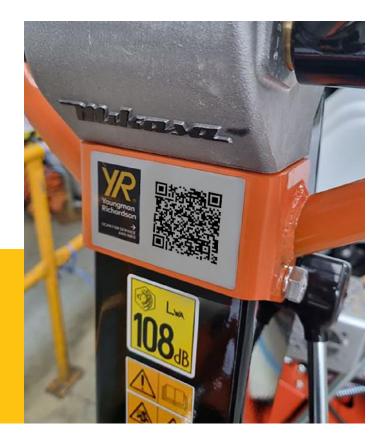

	iilikasa_	SINC
EQUIPMENT LS HANDLING	COMPACTION EQUIPMENT	ACCE
sqvarna		FOSROC
ICTION PRODUCTS FOR EQUIPMENT	HEAVY COMPACTION	CONSTRUCTION PRODUCTS
RAC P		



ACCESS EQUIPMENT

CONTRACTOR PUMPS



ACCESS EQUIPMENT

LIGHT TOWERS & DUST CONTROL



GENERATORS

MINI DUMPERS

LIGCHINE

LASER-GUIDED CONCRETE SCREEDS & EQUIPMENT

Tufftruk

MAKINEX[®]

CONSTRUCTION EQUIPMENT

MINI EXCAVATORS & MINI DUMPERS



PORTABLE CONVEYORS



INDUSTRIAL HEATERS



ENGINES PUMPS GENERATORS



CONCRETE, MORTAR MIXERS & ACCESS EQUIPMENT

We are proud of the back-up service we offer to customers. The importance of stocking genuine spare parts for all the equipment we supply is a high company priority.



YRCO.CO.NZ

HU

TEREX BRA

ACCESS E & MATERIAL

> CONSTRU OUTDO

GENERAC

KOSHIN

PUMPS

CONCRETING EQUIPMENT

-lextoo

BIEMMEDUE

DEHUMIDIFIERS

HAND TOOLS



AERIAL WORK PLATFORMS

AXIM

TILLERS

EXCAVATION SYSTEMS

MARUZEN

BREAKERS & POWER

PACKS

Denyo

GENERATORS & WELDERS

WHITEMAN

PRAMAC

POWER TROWELS

DIESEL ENGINES

PRC

POWER SCREED

HATZ

MATERIALS HANDLING

PRC

GENERATORS & CONCRETE MIXERS & WATERBLASTERS





BRENDON

POWERWASHERS

