

PRODUCT HIGHLIGHTS

Precision Performance

- 3 joysticks with variable proportional control, accuracy in reaching the operation target

Intelligent Maintenance

- Industry leading 7" screen displays faults and status information, for easy reference, reducing service technician assistance. Workers can complete tasks under the remote guidance of qualified service technicians. Convenient for fleet managers to quickly access live machine and maintenance information



Reliable

- Secure and reliable folding arm, luffing operation with hydraulic interlocking, and hydraulic-connection body leveling

Operating Efficiency

- The working platform can be lifted and lowered to any position without the need to operate the folding arm



Standard Features		
7-in display screen	4WD x 2WS	Proportional control with 3 joysticks
Automotive-grade sleeves for all pipes	4-wheel brake	Hydraulic platform leveling
Weighing system	Tilt protection system	Max tilt rating to 5°
Secondary guarding device	Flashing beacon	Telematics-ready connector
Emergency lowering system	White noise alarm	2.44 m(8') platform with swing gate
Fault diagnosis system	Battery isolator	Half mesh (For platform with swinging gate)
Options & Accessories		
AC power to the platform		
1.83m(8')/2.44m(8') platform with swinging gate		
Platform work light		
Glazier kit(for platform with swinging gate)		

ENGINE POWERED ARTICULATING BOOM LIFTS

AB46RJ (AB1530RJ)

Compliant with EAC standards

Model	AB46RJ(AB1530RJ)
Dimensions	
Max Platform Height	46.6 m (152'11")
Max Working Height	48.6 m (159'5")
Max Horizontal Reach	25.5 m (83'8")
A Stowed Length	15 m (49'3")
B Stowed Width	2.49 m (8'2")
C Stowed Height	3.2 m (10'6")
Stowed Length (Transport)	12.3 m (40'4")
Stowed Width (Transport)	2.49 m (8'2")
Stowed Height (Transport)	3.2 m (10'6")
D Wheelbase	5.2 m (17'1")
Ground Clearance	0.33 m (1'1")
Platform Size (L×W×H)	2.44 m×0.91 m×1.1 m (8'×3'×3'7")
Performance	
Max Platform Capacity (Restricted/Unrestricted)	455 kg/275 kg (1,001 lbs/606 lbs)
Max Platform Occupants (Restricted/Unrestricted)	2 persons
Drive Speed (Stowed)	0~4.5 km/h (0~2.8 mph)
Drive Speed (Raised)	0~0.48 km/h (0~0.3 mph)
Gradeability	40%
Turntable Rotation	360°/Continuous
Platform Rotation	180°
Jib Rotation	150°
Tilt Rating	5°
Turning Radius (Inside/Outside)	7.1 m/9.52 m (23'4"/31'3")
Turntable Tail-Swing	4.6 m (15'1")
Max Allowable Side Force	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s (28 mph)
Tire Spec/Type	445/50D710 24PR (foam- filled)
Power	
Drive × Steer	4 WD×4 WS
Engine	Cummins QSF3.8t3TC99/ EU Stage 3A
Hydraulic Tank Capacity	410 L (90 gal (UK)/108 gal (US))
Diesel Tank Capacity	200 L (44 gal (UK)/53 gal (US))
System Voltage	12 VDC
Weight	
Weight	27,300 kg (60,186 lbs) 4 WD
Standards Compliance	
CE/AS/EAC	

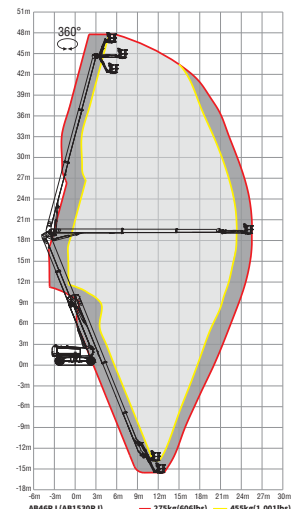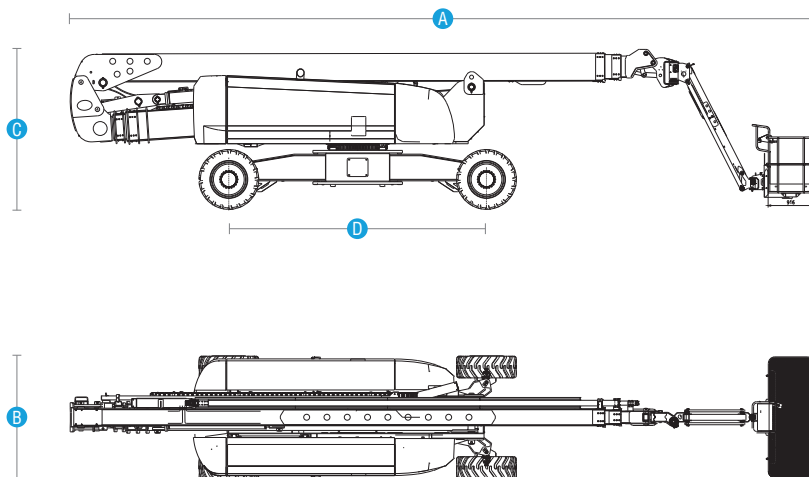

Auckland, Head Office
6-10 Parkway Drive,
Mairangi Bay,
Auckland
(+64) 09 443 2436
sales@yrco.co.nz

Auckland, Mt Wellington
20L Sylvia Park Road,
Mt Wellington,
Auckland
(+64) 09 553 5470
salesmtwell@yrco.co.nz

Waikato
3/31 Chafer Place,
Te Rapa,
Hamilton
(+64) 07 595 0245
saleswaikato@yrco.co.nz

Wellington
8 Broken Hill Road,
Porirua,
Wellington
(+64) 04 212 2456
saleswell@yrco.co.nz

Christchurch
20 Nga Mahi Road,
Sockburn,
Christchurch
(+64) 03 341 6923
saleschch@yrco.co.nz

4C+
CELEBRATING
OVER 40 YEARS
IN BUSINESS

**YR Youngman
Richardson**